


WAEATHERPROOF LAMPHOLDER

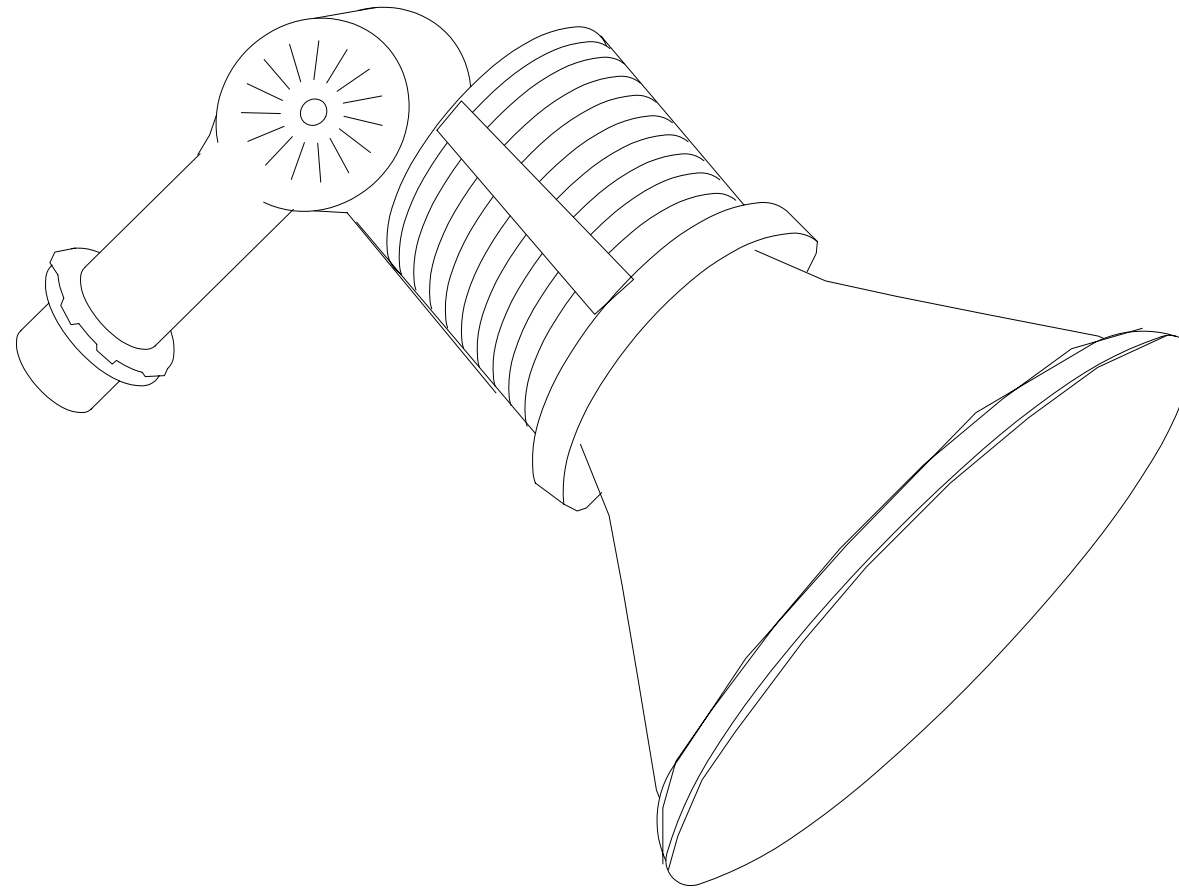

THE FIXTURE SHALL BE DIE-CAST ALUMINUM, WEATHERPROOFED TO PROTECT THE LAMP BASE AND WIRING AREA. THERE SHALL BE SUFFICIENT EXERNALLY CAST RIBS FOR HEAT DISSIPATION. WEATHERPROOFING SHALL BE BY MEANS OF A LOCKED-IN-PLACE SILICONE RUBBER DIAPHRAM WHICH FIRMLY COMPRESSES AGAINST THE NECK OF THE LAMP TO PREVENT MOISTURE FROM ENTERING THE SOCKET AND WIRE AREA. THE SOCKET SHALL BE GLAZED HEAT-PROOF PORCELAIN WITH A COPPER NICKEL PLATED SCREW SHELL HAVING A SPRING-LOADED NICKEL PLATED CENTER TAB. THE WIRE LEADS SHALL BE UNSPLICED UL APPROVED OUT-DOOR WIRE WITH 9" EXCESS FOR LATER CONNECTION. THE SWIVEL ARM SHALL BE CAST ALUMINUM WITH INTERLOCKING TEETH FOR POSITIVE LOCKING AND CALIBRATED FOR 180 DEGREES. ALL HARDWARE SHALL BE EXTRA HEAVY PLATED. THE FIXTURE SHALL BEAR THE UL AND/OR C.S.A. LABEL. THE FIXTURE SHALL BE COMPLETE WITH BOX COVER FOR SINGLE ARM, AND FIXTURE NO 10. REQUIRES BOX COVER FOR DOUBLE ARM.

LAMPS

I-9

1 - 150W PAR 38

I-10

1 - 150W PAR 38

10-25-88