



## CEILING EXHAUST FAN

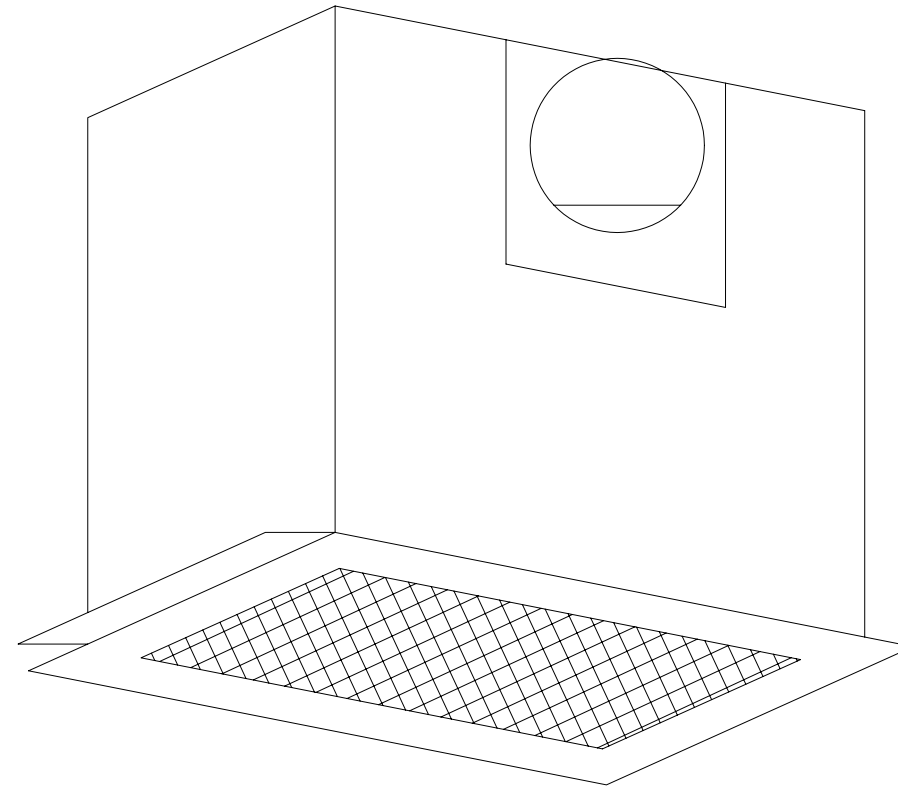

## ELECTRICAL



MANUAL  
STARTER SWITCH  
TOGGLE SWITCH WITH OR  
WITHOUT PILOT LIGHT.  
MOUNTED IN HANDY BOX  
WITH STAINLESS STEEL  
COVER PLATE. AVAILABLE  
WITH OR WITHOUT OVER-  
LOAD PROTECTION.

THE CEILING FAN HOUSING TO BE CONSTRUCTED OF PHOSPHATIZED STEEL WITH AN OVEN BAKED ENAMEL FINISH. GOUSING INTERIOR ACOUSTICALLY LINED WITH 1/2 INCH THICK INSULATION. DISCHARGE OUTLET ADAPTABLE TO HORIZONTAL OR VERTICAL POSITIONS. TERMINAL BOX INTERNALLY MOUNTED FOR MOTOR HOOK-UP. MOTOR MOUNTED ON RESILIENT ELASTIC GROMMETS. FAN TO HAVE A FOWARD CURVED CENTRIFUGAL WHEEL. FAN TO BEAR THE AMCA SEAL FOR AIR AND SOUND PERFORMANCE. FAN TO BE UL LISTED.

HORSEPOWER, CFM, VOLTAGE, AND PHASE AS SHOWN ON DRAWINGS.

E-45A

11-20-88