


INTERIOR CEILING FIXTURE

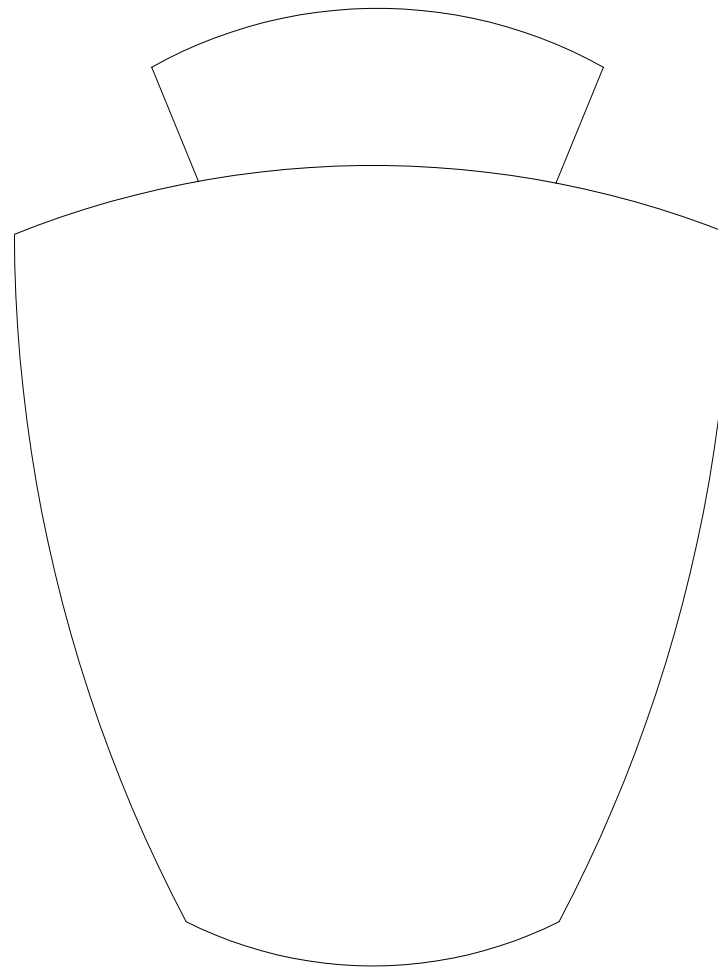

FIXTURE SHALL BE DIE-CAST ALUMINUM CONSTRUCTION. SHALL FIT BOTH 3 1/4" AND 4" OUTLET BOXES, AND SHALL BE EQUIPPED WITH HEAT-PROOF NEOPRENE GASKET. THE GLOBE SHALL BE SCREW-IN OPALESCENT GLASS. MINIMUM DIAMETER SHALL BE 6", MINIMUM OVERALL HEIGHT OF FIXTURE SHALL BE 7 1/2". FIXTURE SHALL BEAR THE UL LABEL.

LAMP

11-26-88

1 - 100W

1-2