


PLAN

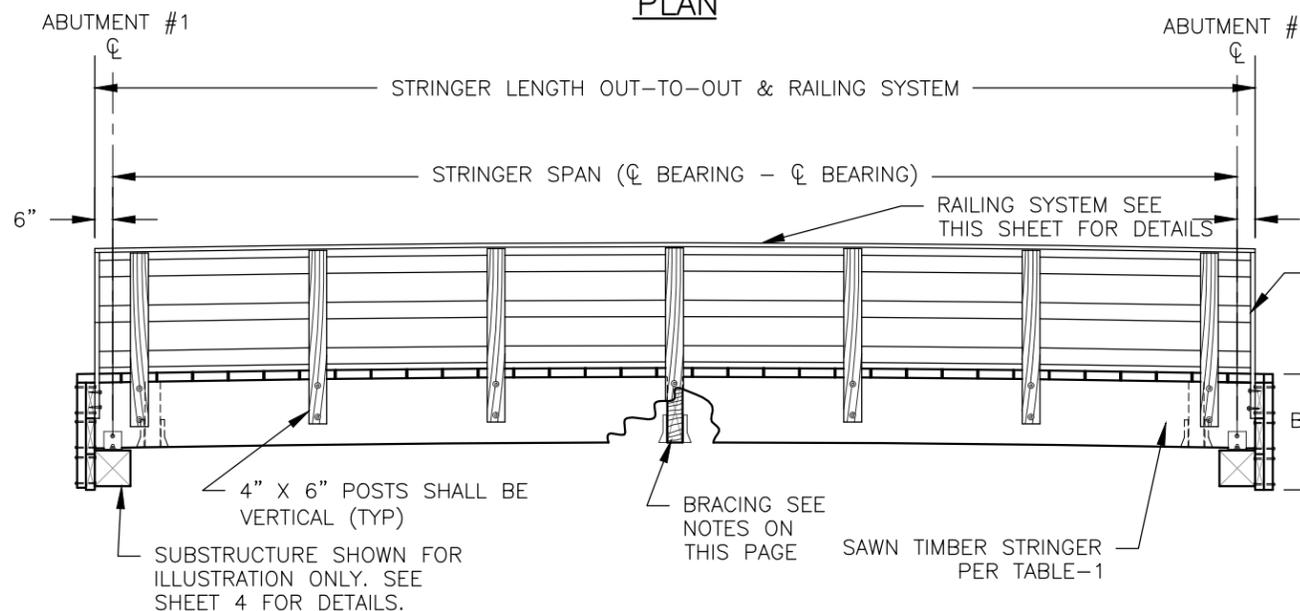


ELEVATION

NOTES:

GRADE SHOWN = 0.0%, RUNNING PLANKS NOT SHOWN FOR CLARITY

- ALL DIMENSIONS IN TABLE-1 ARE NOMINAL (ROUGH SAWN). THE MINIMUM STRINGER DEPTH FOR BRIDGES WITH A PEDESTRIAN RAILING SYSTEM IS 15-INCHES. BRIDGES WITH STRINGER DEPTHS LESS THAN 15-INCHES SHALL HAVE CURBS ONLY. THE MINIMUM NUMBER OF STRINGERS IS THREE.
- FASTEN DECK PLANKS TO STRINGERS WITH TWO ROWS 5/16-INCH DIAMETER X 7-INCH RING SHANK NAILS PER PLANK AT EACH STRINGER. ALTERNATE SIDES.
- FASTEN RUNNING PLANKS TO DECK WITH 40d (5-INCH RING SHANK) NAILS AT 24-INCH SPACING. ALTERNATE SIDES WITH TWO AT EACH END.
- PROVIDE A MINIMUM 1/2-INCH SPACE BETWEEN BLOCKING AND BACKWALL FOR AIR CIRCULATION.
- SPLICE RAILS AT POSTS. RAILS SHALL BE CONTINUOUS FOR TWO POST SPACES. DO NOT LOCATE MORE THAN ONE RAIL SPLICE AT ANY ONE POST.
- BRACING REQUIRED AT THE ENDS OF EACH MEMBER. THE BRACING SHALL BE THREE-QUARTERS TO FULL DEPTH AND PLACED WITHIN A DISTANCE OF THE DEPTH OF THE BEAM FROM THE CENTERLINE OF BEARING. BRACING REQUIRED AT MID-SPAN FOR SPANS OVER 20 FEET LONG.
- WOOD BLOCKING SHALL BE BOLTED TO STRINGERS WITH STEEL ANGLES OR SUSPENDED IN STEEL HANGERS THAT ARE NAILED TO BLOCKS AND STRINGER SIDES

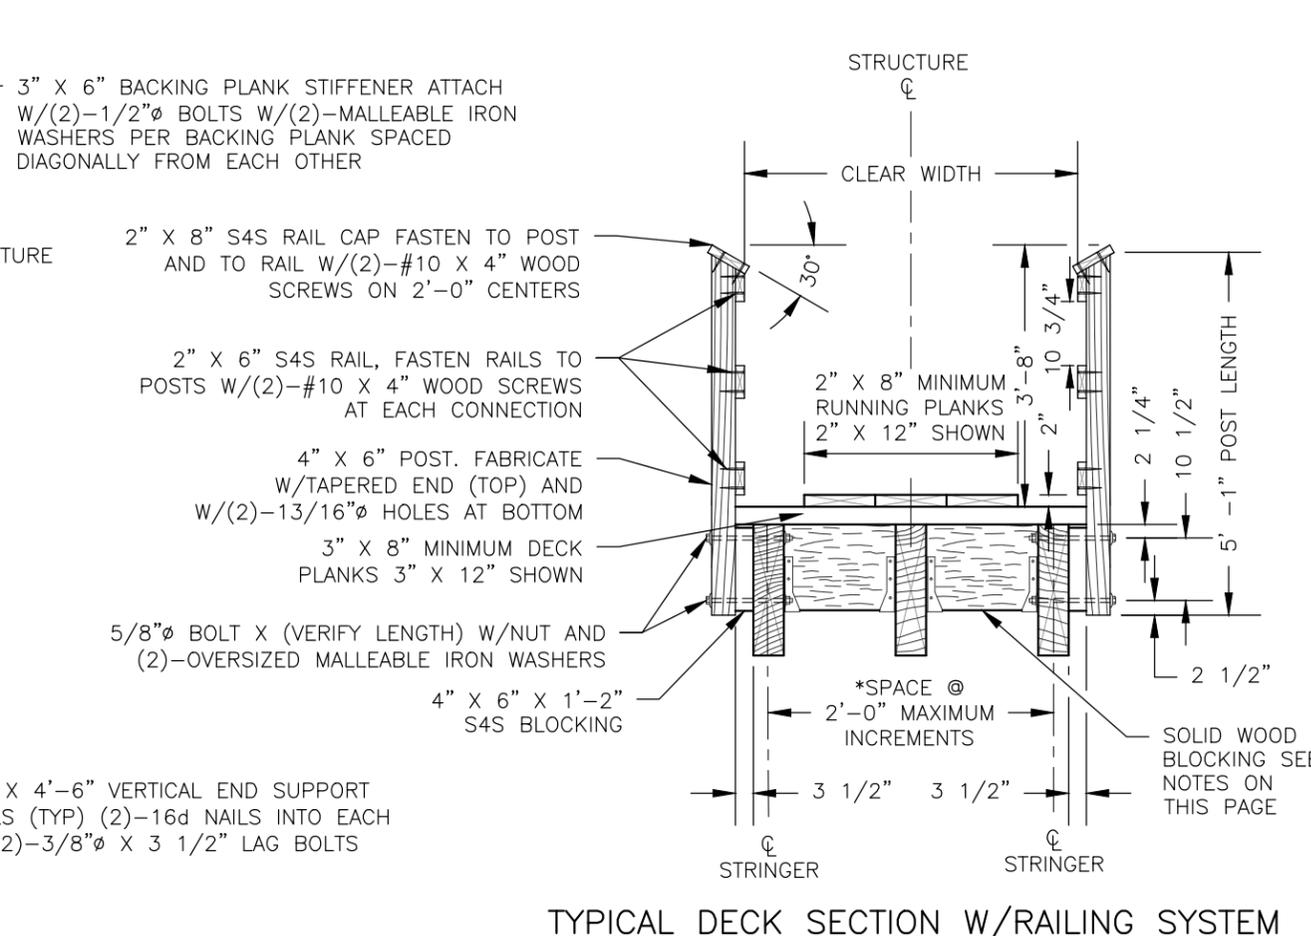

TYPICAL DECK SECTION W/RAILING SYSTEM

***TABLE-1: SOLID SAWN STRINGER SIZE REQUIREMENTS - LRFD**

**STRINGER SPAN (FEET)	TIMBER SPECIES - DOUGLAS FIR - LARCH				
	GRADE - NO.1				
	DESIGN LOADING IN POUNDS PER SQUARE FOOT				
	PEDESTRIAN LIVE LOAD		GROUND SNOW LOAD		
	***65	90	120	150	200
● 10	3" X 8"	3" X 10"	3" X 12"	4" X 10"	4" X 12"
● 15	4" X 10"	4" X 12"	4" X 14"	4" X 16"	6" X 12"
● 20	4" X 14"	6" X 12"	6" X 12"	6" X 14"	6" X 16"
▲ 25	6" X 14"	6" X 14"	6" X 16"	6" X 18"	6" X 20"
▲ 30	6" X 16"	6" X 18"	6" X 20"	6" X 20"	8" X 20"

- INSTALL BRACING WITHIN A DISTANCE OF THE DEPTH OF THE BEAM FROM THE CENTERLINE OF BEARING
- ▲ INSTALL BRACING WITHIN A DISTANCE OF THE DEPTH OF THE BEAM FROM THE CENTERLINE OF BEARING & MID-SPAN
- * STRINGER SIZE SHALL BE THE LARGER OF THE PEDESTRIAN OR GROUND SNOW LOAD SIZE REQUIRED FOR THE SITE CONDITIONS
- ** STRINGER LENGTH EQUAL TO STRINGER SPAN PLUS ONE FOOT
- *** REQUIRES REGIONAL BRIDGE ENGINEER APPROVAL



PROJECT NAME & LOCATION

DRAWING NAME
SAWN TIMBER STRINGER TRAIL BRIDGE

SECTION: **962 - SAWN TIMBER TRAIL BRIDGE** TYPICAL ID: **STS**

REVISION DATE

NOT TO SCALE

DRAWING NO.
STD_962-10-02a

SHEET OF