


TRAIL OBLITERATION

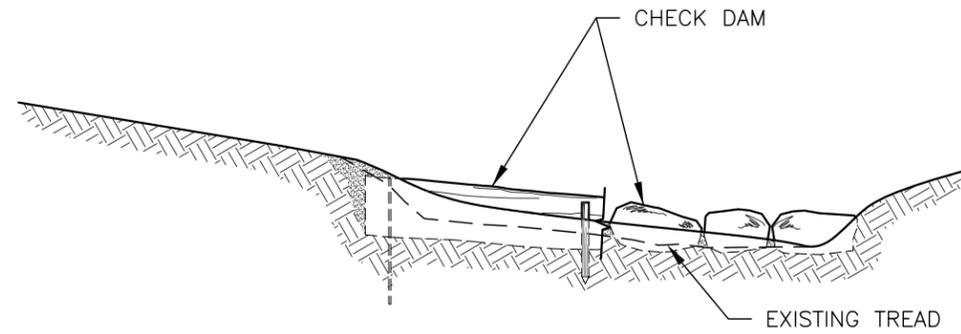


A CHECK DAM SECTION

CHECK DAM SPACING

DRAINAGE GRADE %	DRAINAGE SPACING (FEET)
<3	OCCASIONAL
3-7	50
8-12	25
>12	15

TYPICAL ID	SECTION TYPE	LENGTH	COMMENTS
OBT-1			


N/A WHEN NOT APPLICABLE
 ****FOR CHECK DAM SEE SHEET STD_928-01

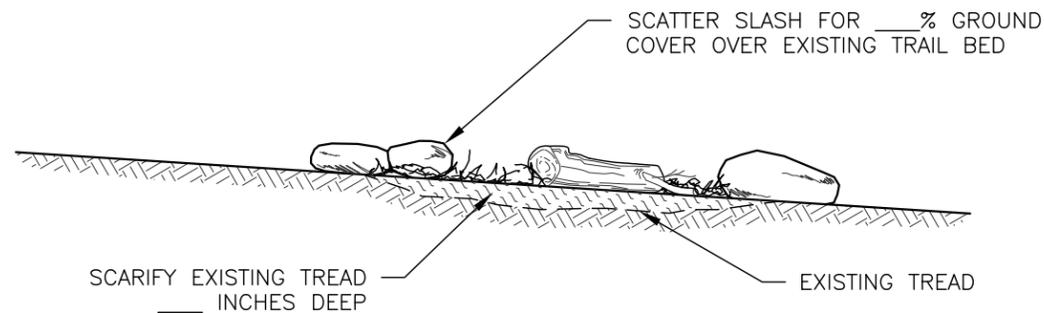


B SCARIFICATION AND SLASH PLACEMENT SECTION

NOTES:

1. SLASH CONSISTS OF LOGS, LIMBS, BRUSH, AND ROCKS PLACED IN A WAY TO CATCH SEDIMENT MOVEMENT.
2. SLASH TO BE SPREAD RANDOMLY ACROSS TRAIL BED. DO NOT SPREAD PARALLEL TO TRAIL SURFACE.
3. LIMB ALL TREES AND SHRUBS AND TAMP SLASH INTO GROUND SO THAT 80% OF SLASH IS IN CONTACT WITH THE GROUND.
4. DRAINAGE DIPS WILL BE STAKED IN THE FIELD WHEN REQUIRED AND WILL BE PAID SEPARATELY UNDER SECTION 927.
5. SEEDING, FERTILIZING & MULCHING WHEN REQUIRED WILL BE PAID UNDER SECTION 981.

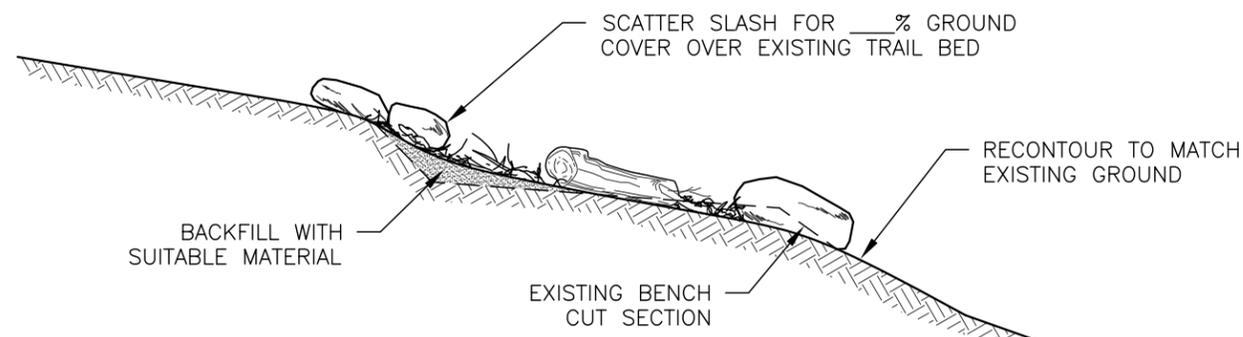

C RECONTOUR & SLASH PLACEMENT SECTION

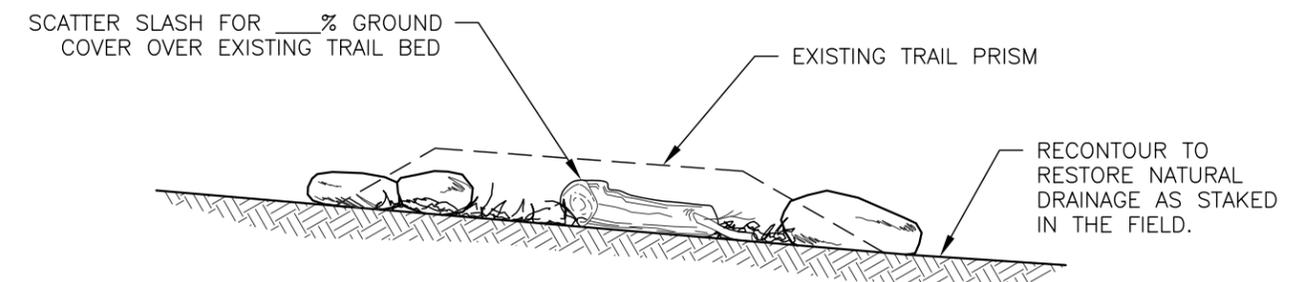

D RESTORE NATURAL DRAINAGE SECTION