



### WOOD SIGN POST SPACING AND SIZE REQUIREMENTS

POST SIZE (IN)	SINGLE POST		TWO-POST		MINIMUM EMBEDMENT DEPTH (FT)
	MAX SIGN WIDTH (IN)	MAX SIGN AREA (SQ.FT)	MAX SIGN WIDTH (IN)	MAX SIGN AREA (SQ.FT)	
4 X 4	*48	10	72	20	3
4 X 6	48	20	72	50	4
6 X 6	48	20	96	95	4

\*THE MAXIMUM WIDTH IS 36 INCHES FOR DIAMOND-SHAPED SIGNS.

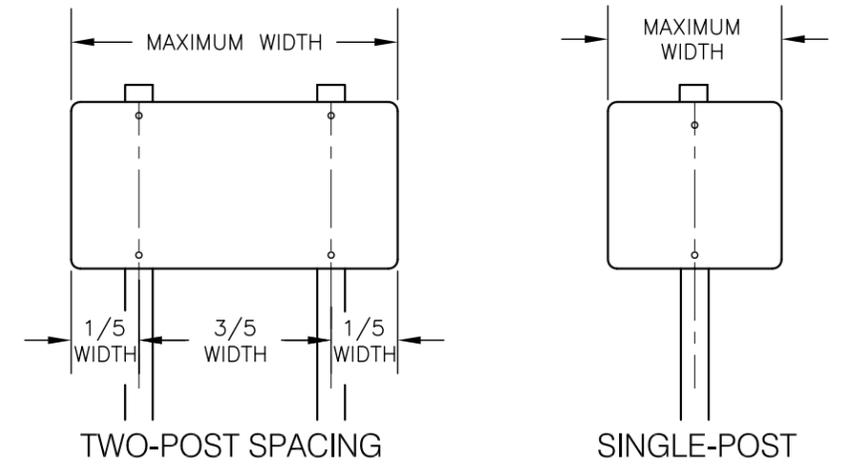

### GUIDLINES FOR WOOD SIGN POSTS

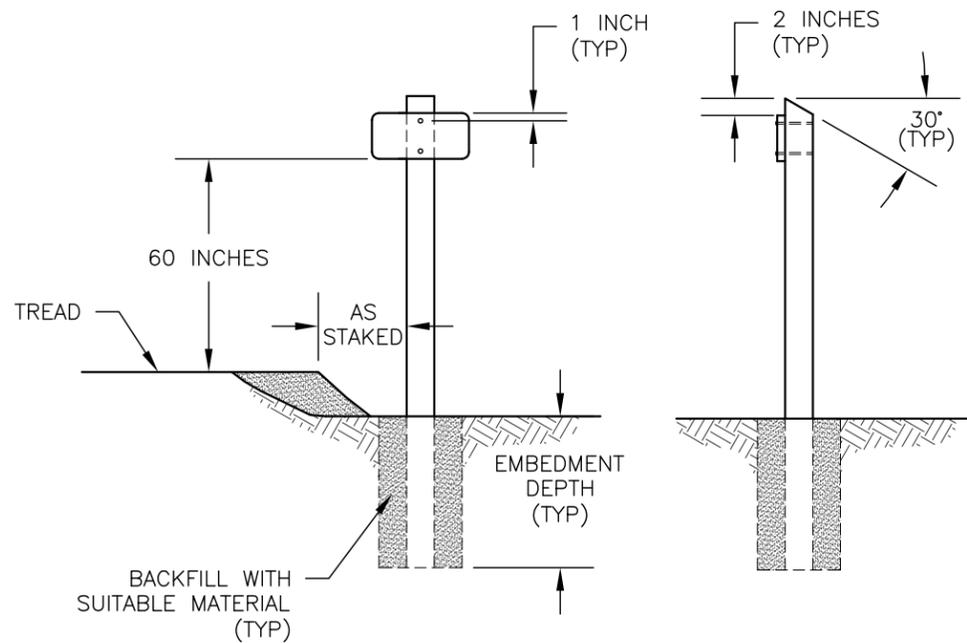

### SIGN AND POST INSTALLATION

#### NOTES:

- REFER TO "EM-7100-15 SIGN AND POSTER GUIDELINES FOR THE FS" FOR SIGN SPECIFICATIONS, MATERIALS, AND PLACEMENT.
- POST SPACING APPLIES TO BOTH WOOD AND STEEL POSTS.
- FOR SIZES OF STEEL POSTS, REFER TO EM 7100-15.
- ALL HARDWARE SHALL BE ALUMINUM OR GALVANIZED.
- LAG SCREW FASTENERS REQUIRE LEAD HOLES IN POSTS AND SHALL BE DRILLED PRIOR TO INSTALLATION.
- BOLT HOLES IN POSTS TO BE 1/16 INCH LARGER (MAXIMUM) LARGER THAN THE BOLT HOLE REQUIREMENT.
- SIGN AND MARKER POSTS ONLY SHALL BE TREATED WITH CCA (CHROMATED COPPER ARSENATE) FOR UC4A GROUND CONTACT FOR GENERAL USE.
- COMPACT BACKFILL IN 6 INCH LIFTS UNTIL NO VISUAL DISPLACEMENT.