



US006092418A

United States Patent [19]
Schafer et al.

[11] **Patent Number:** **6,092,418**
[45] **Date of Patent:** **Jul. 25, 2000**

- [54] **METHOD AND APPARATUS FOR DETECTING AND CHARACTERIZING SPLITS IN LOGS**
- [75] Inventors: **Mark E. Schafer**, Morristown, Pa.;
Robert J. Ross, Madison, Wis.
- [73] Assignees: **Perceptron, Inc.**, New Berlin, Wis.;
The United States of America as represented by the Secretary of Agriculture, Washington, D.C.

- [21] Appl. No.: **09/196,674**
- [22] Filed: **Nov. 20, 1998**

Related U.S. Application Data

- [60] Provisional application No. 60/082,018, Apr. 16, 1998.
- [51] **Int. Cl.**⁷ **G01N 29/04**
- [52] **U.S. Cl.** **73/598**; 73/597; 73/618;
73/635; 73/645
- [58] **Field of Search** 73/597, 598, 599,
73/618, 624, 632, 633, 635, 639, 646, 645

[56] **References Cited**
U.S. PATENT DOCUMENTS


4,838,085	6/1989	Pellerin et al.	73/597
4,858,469	8/1989	Hosgood et al.	73/579
5,024,091	6/1991	Pellerin et al.	73/597
5,237,870	8/1993	Fry et al.	73/588
5,307,679	5/1994	Ross	73/597
5,396,799	3/1995	Ross et al.	73/579
5,404,755	4/1995	Olsen et al.	73/639
5,760,308	6/1998	Beall et al.	73/644
5,804,728	9/1998	Beall et al.	73/598

Primary Examiner—Hezron Williams
Assistant Examiner—Thuy Vinh Tran
Attorney, Agent, or Firm—Woodcock Washburn Kurtz Mackiewicz & Norris LLP

[57] **ABSTRACT**

Ultrasonic techniques are applied to the measurement of wooden members to identify splits in wooden members. Multiple angularly displaced measurements allow detection of splits at arbitrary angles.

14 Claims, 7 Drawing Sheets

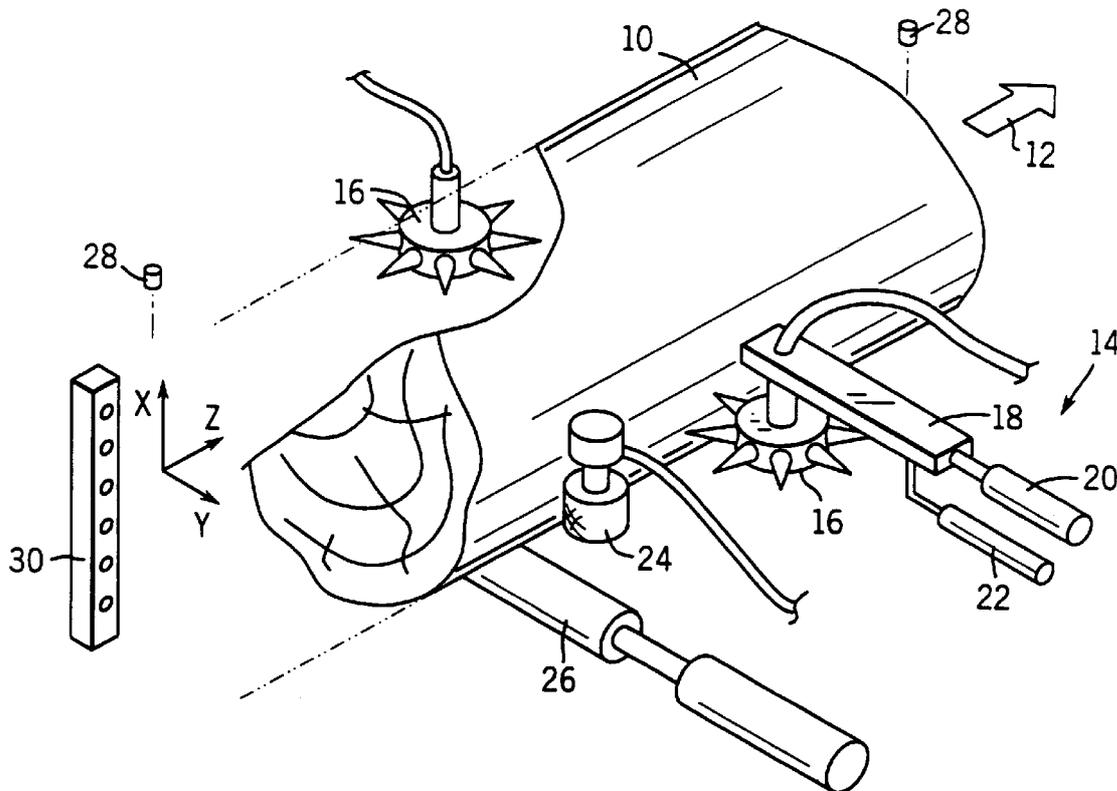

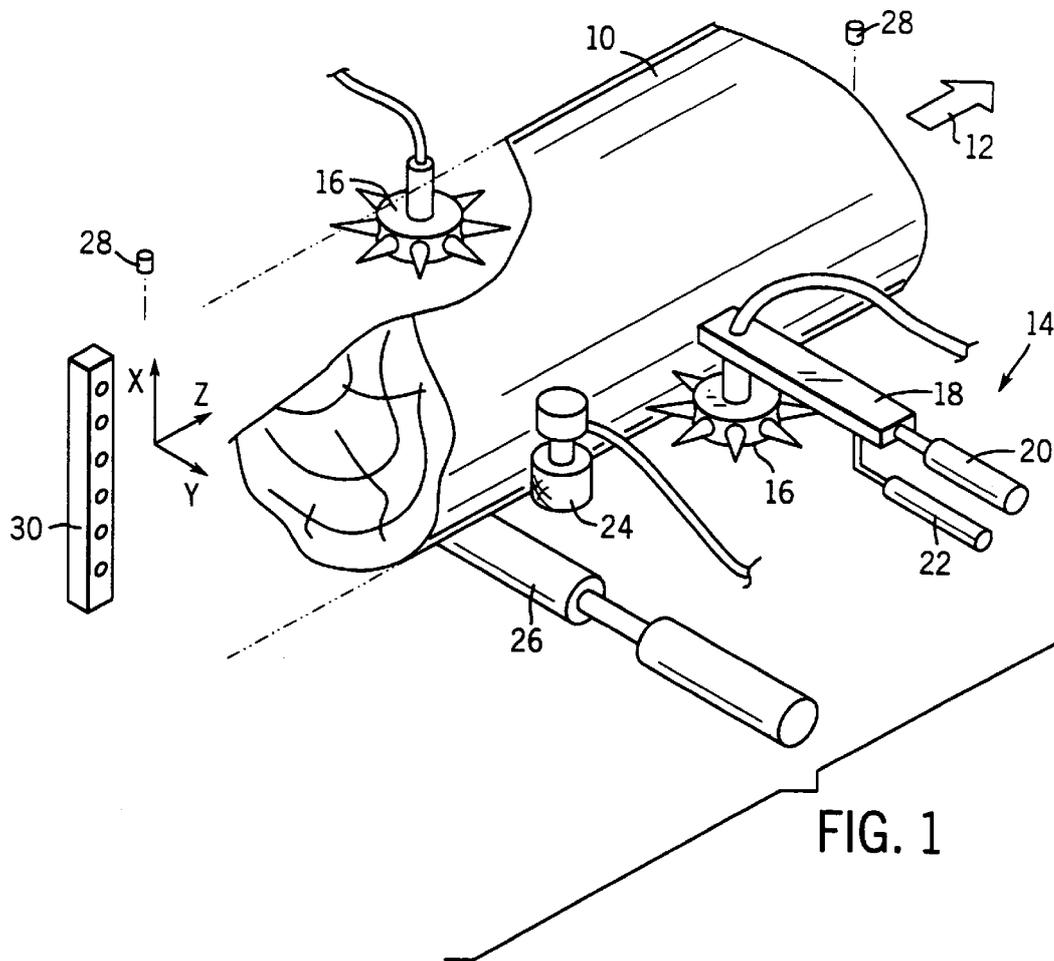


FIG. 1

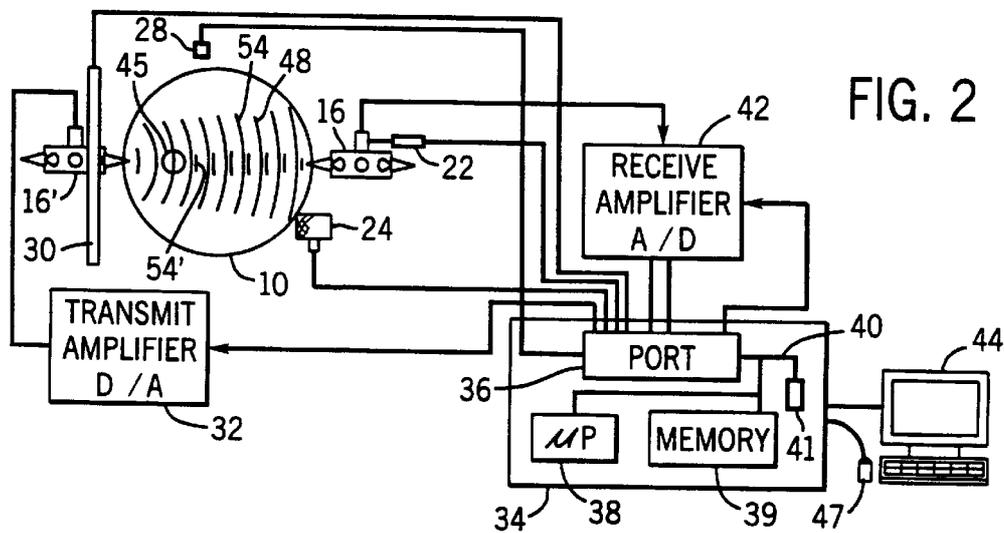


FIG. 2

FIG. 3

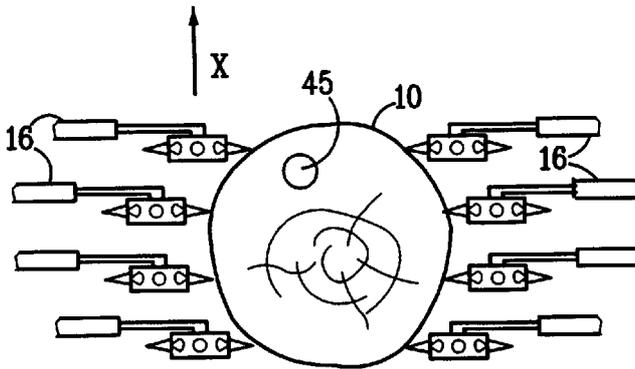
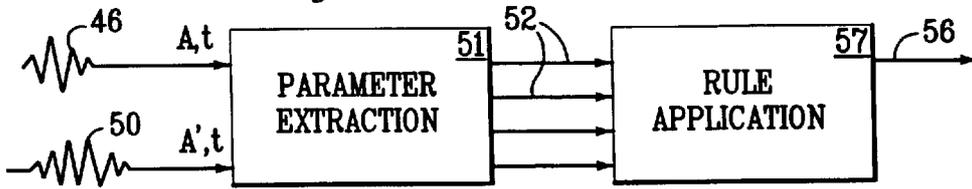


FIG. 5

FIG. 6

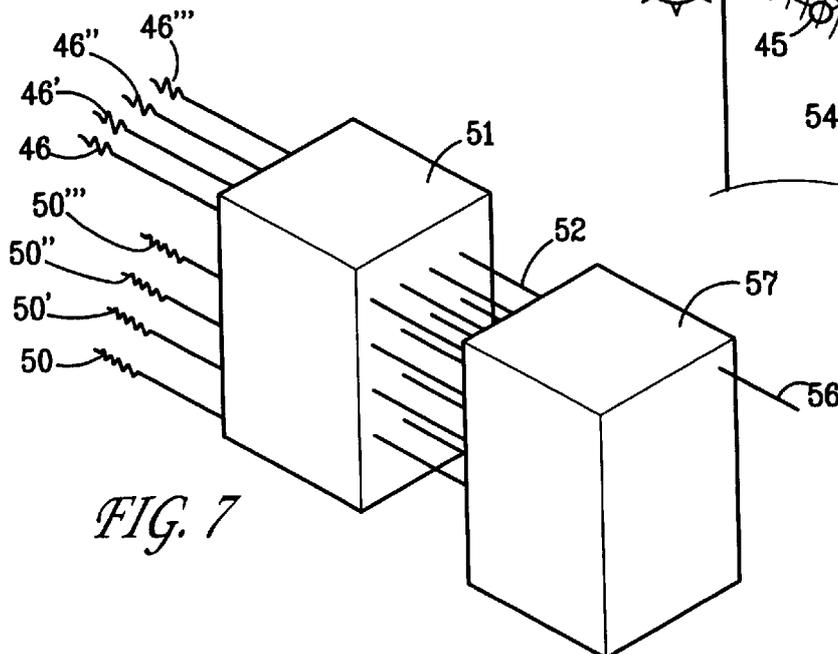
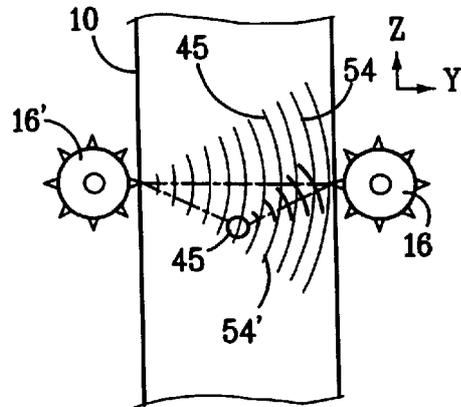


FIG. 7

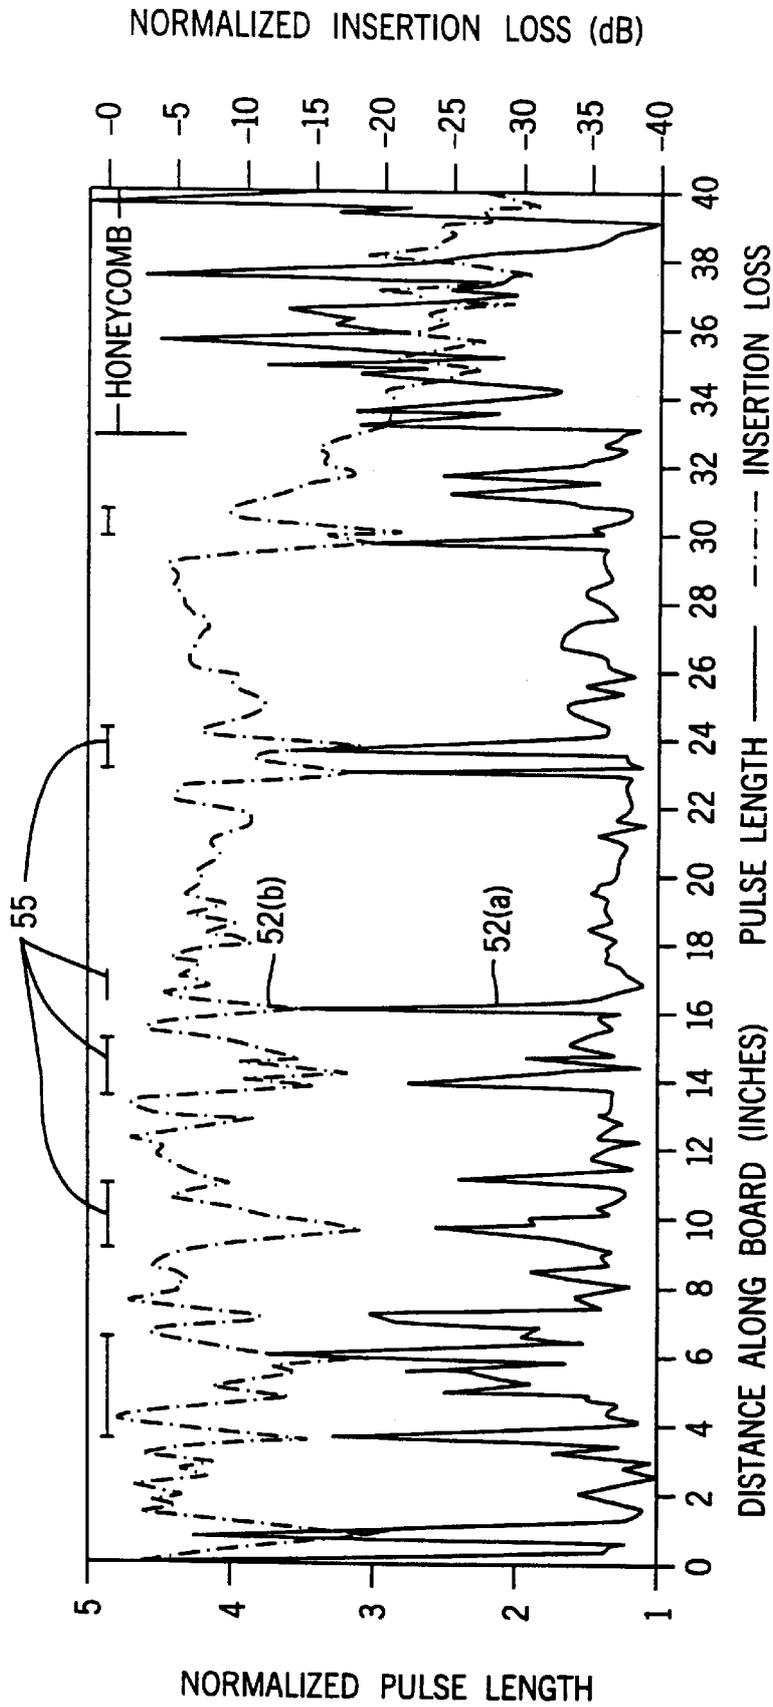


FIG. 4

FIG. 8

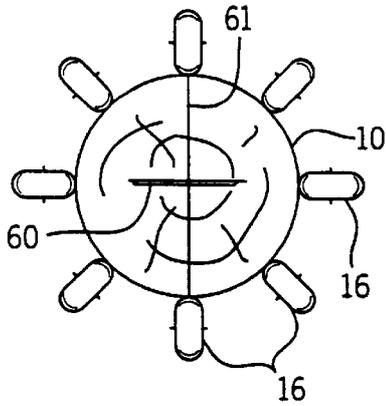


FIG. 9

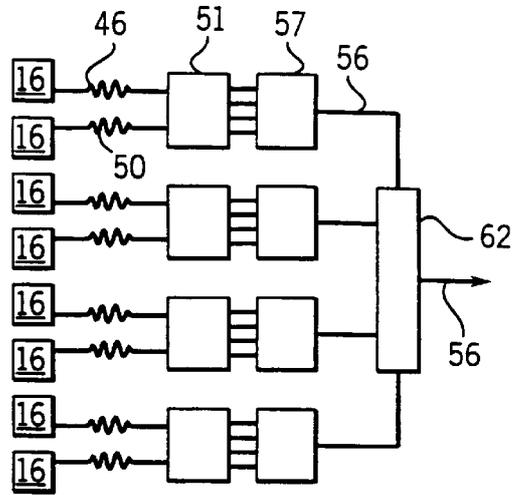


FIG. 10

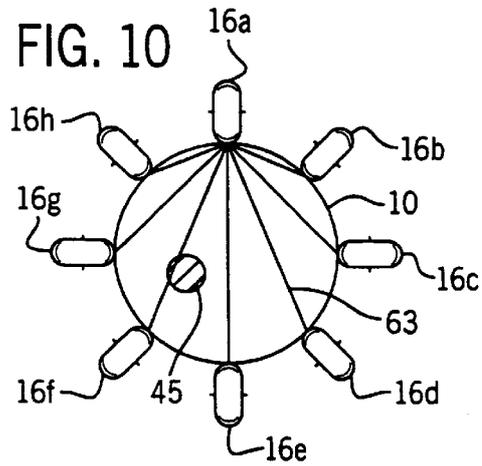


FIG. 11

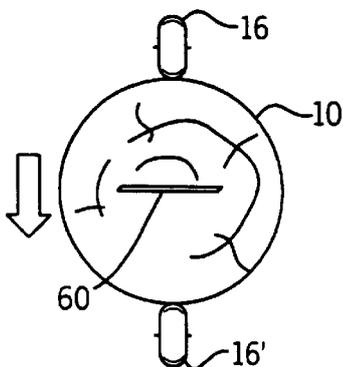
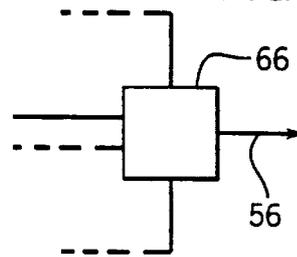


FIG. 12

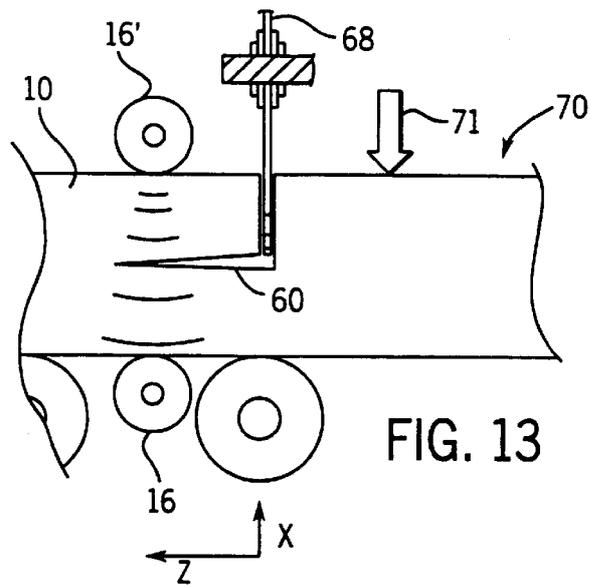
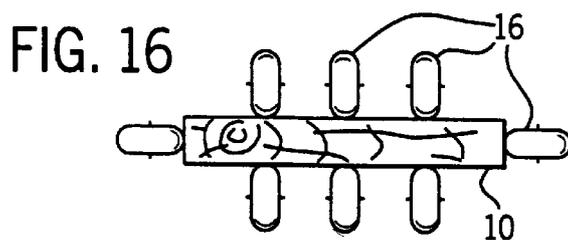
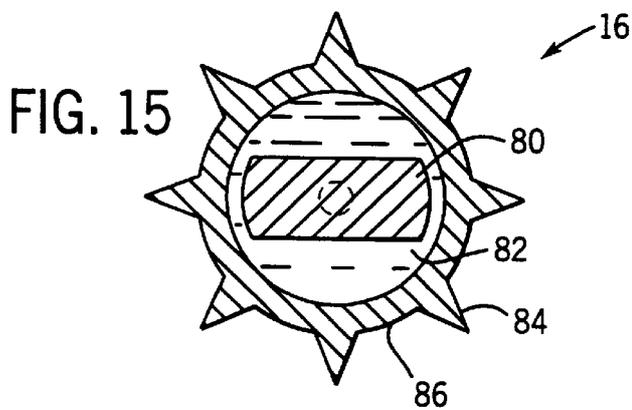
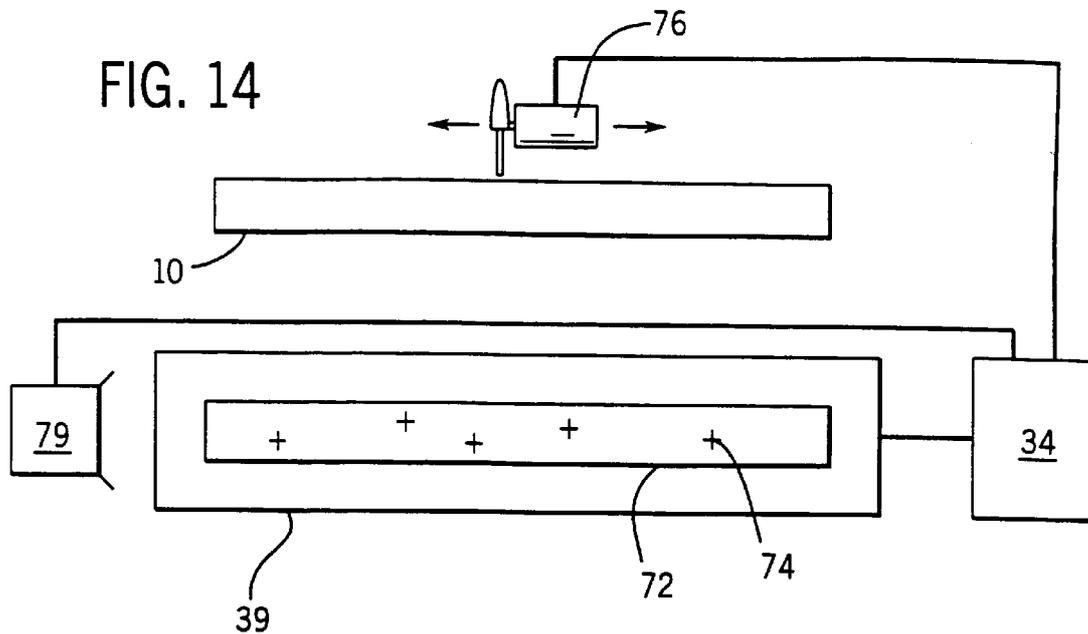


FIG. 13



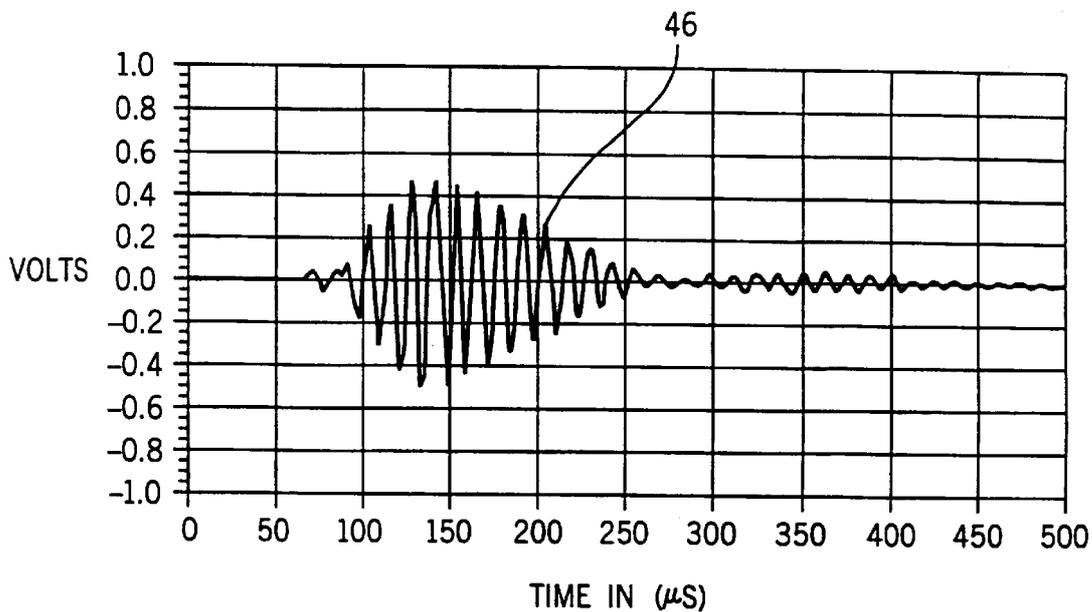


FIG. 17

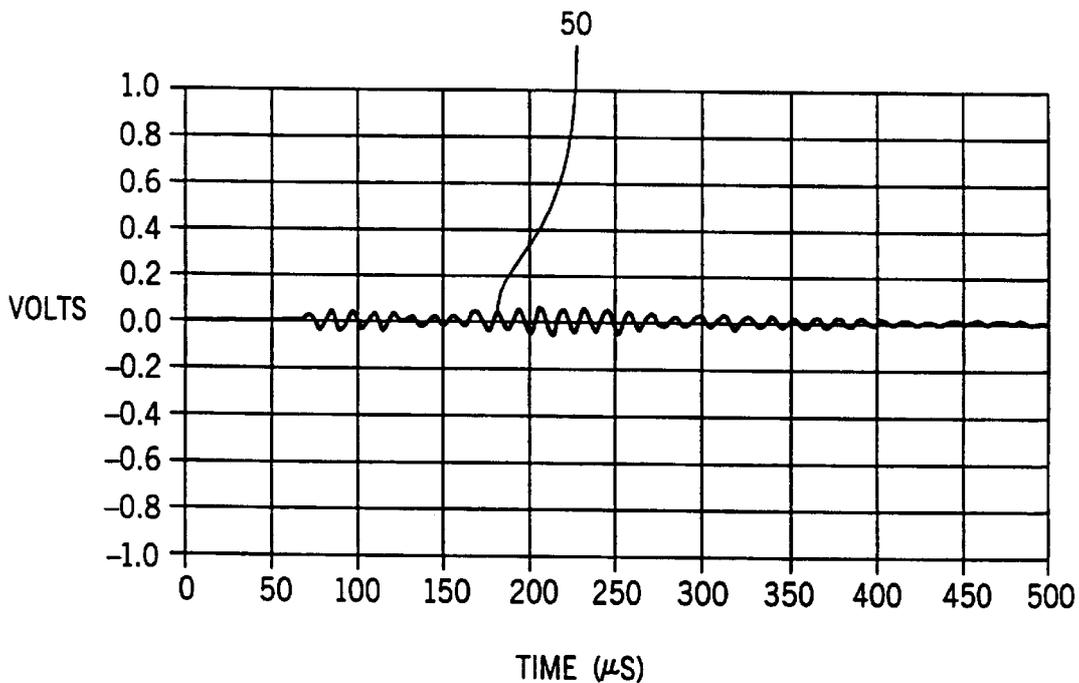


FIG. 18

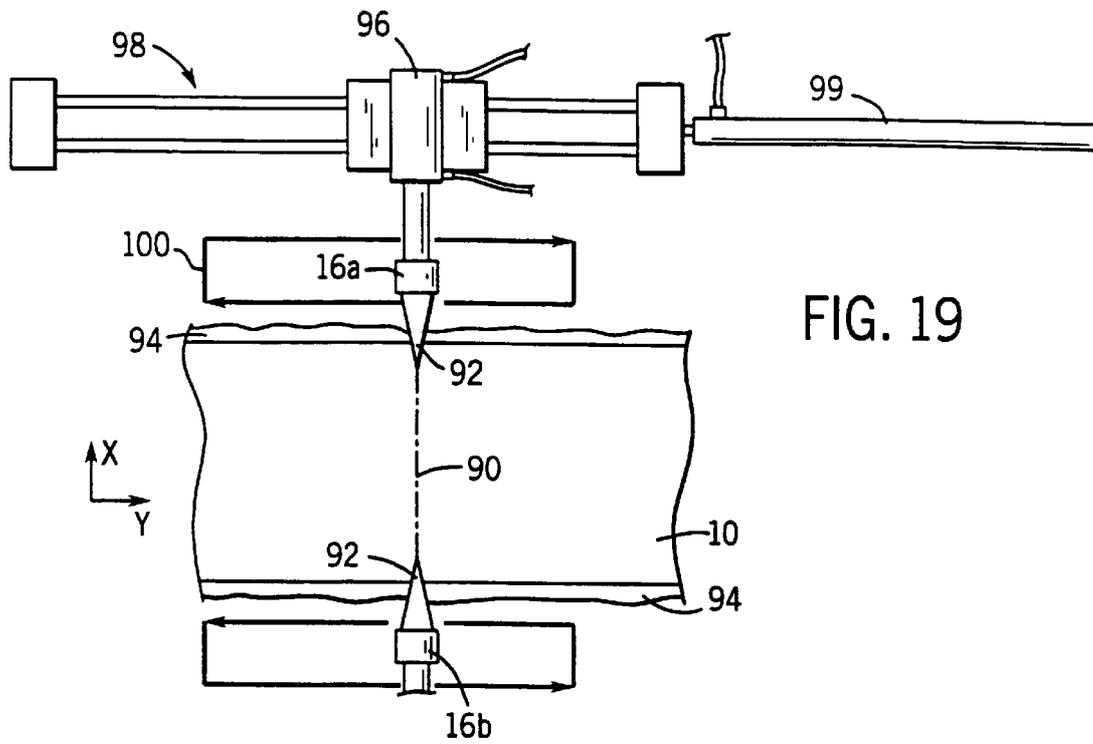


FIG. 19

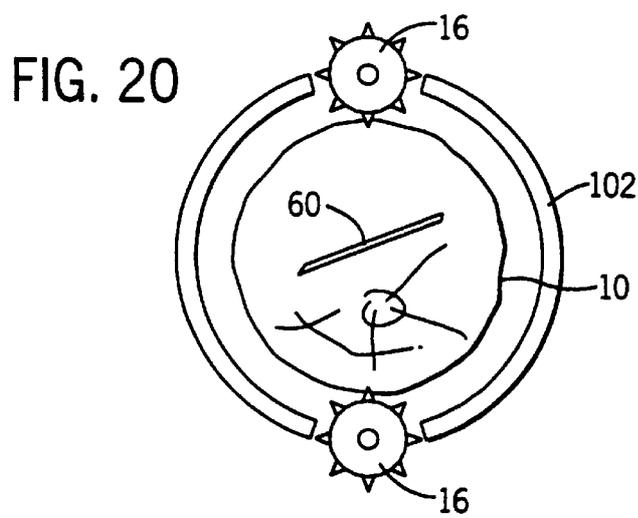


FIG. 20

1

METHOD AND APPARATUS FOR DETECTING AND CHARACTERIZING SPLITS IN LOGS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is based on provisional application 60/082,018 filed Apr. 16, 1998 of the same name and hereby incorporated by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

BACKGROUND OF THE INVENTION

The present invention relates to an apparatus for the detection of splits in logs and other wooden members, and specifically to an apparatus employing ultrasonic energy to detect and characterize such splits. The wooden members may be trees, logs, beams, planks, lumber, boards or wood composites and the like.

When logs are sawn to size in the field using commercial harvesters, they are often subject to the creation of splits when cut. This is because one end of the log is unsupported during the cutting operation. Splits also occur when the tree is initially felled. The splits are undesirable, introduce defects in the lumber that is sawn from the logs, and thereby reduce the value of the log itself. A recent examination of the problem indicates that up to 70% of logs harvested in this manner contain splits. If the problem is detected in the field at the time of sawing, then either the operator can modify his/her practice to reduce this incidence, or the logs can be cut longer such that sufficient material will remain free of defects. In other words, if a 12 foot long clear log is desired, and the harvester detects end splits for a distance of 12 inches, then the next cut will be made so as to have the required 12 feet after the defective portion is removed. Traditionally identification of defects and other features affecting lumber grade has been performed visually, for example, by a saw operator visually inspecting the log or board prior to determining the necessary cross or rip cuts that will yield the best product output or yield. Recently a number of electronic scanning systems have been produced using cameras and lasers to automate this visual process. Such optical techniques are limited to the detection of superficial defects in the wooden members and even these techniques may be defeated by dirt, bark, stain or other markings on the outside of the log. More importantly, internal defects such as splits are generally not visible.

What is needed is an apparatus for detecting and characterizing splits internal to a wooden member, that is also robust against the harsh environment of a typical lumber operation or the like and that is safer, less costly and more compact than instruments based on x-rays or other electromagnetic radiation.

BRIEF SUMMARY OF THE INVENTION

The present inventors have discovered that splits create an acoustic discontinuity that may be detected by an ultrasonic signal transmitted through the wooden member across the grain at a number of different angles around the perimeter of the wooden member and comparing the received waveforms. Even after the splits have closed and are no longer visible, they create an acoustic discontinuity that may be detected. Detection of the splits may be used to control the operation of a saw to change cut locations or modify the sawing technique.

2

Specifically, the present invention provides an apparatus for detecting splits in wooden members using at least one pair of opposed ultrasonic transducers positioned to contact the wooden members on opposed points along an axis across a grain of the wooden member. Driving circuitry drives one of the ultrasonic transducers so as to produce an ultrasonic wave of known characteristics and detection circuitry connected to an other of the ultrasonic transducers receives the ultrasonic wave after passage through the wooden member to provide a measurement. The wooden member measurement is repeated along axes at a plurality of angles about the outer perimeter of the wooden member across the grain of the wooden member and an electronic computer communicating with the driving and detection circuits executes a stored program to compare the wooden member measurements at the plurality of angles to detect a split in the wooden member indicated by variation in the measurements.

Thus it is one object of the invention to provide a simple and inexpensive method of detecting splits in wooden members.

Multiple pairs of ultrasonic transducers may be each positioned to transmit and receive an ultrasonic wave along different circumferential angles or may use a movable carriage holding at least one pair of ultrasonic transducers and movable about the wooden member to position the ultrasonic transducers at the plurality of angles.

Thus it is another object of circumferential the invention to permit flexibility in selecting between an electrical scanning employing multiple transducers or a mechanical scanning employing a single or limited number of pairs of transducers.

The comparison performed by the apparatus may address the attenuation of total energy in the received ultrasonic wave, the change in spectral energy distribution in the received ultrasonic wave, the spreading of the temporal distribution of energy in the received ultrasonic wave, phase distortion in the received ultrasonic wave or combinations of the above.

Thus it is another object of the invention to provide for a multiparameter measurement so as to improve the accuracy and robustness of the ultrasonic measurements.

The apparatus may include a means for measuring the thickness of the wooden members along the axis and may calculate a time of flight of the ultrasonic wave between transducers to determine a sound velocity, or may determine a change in energy or phase as a function of thickness.

Thus it is another object of the invention to account for other factors affecting the received ultrasonic waveform so as to improve the ability of the apparatus to detect localized defects or other features within wooden members of varying thickness and type.

The apparatus may include a means for moving the wooden members with respect to the ultrasonic transducers perpendicular to the axis of the transducers and the output of the electronic computer may be a measure of wooden members' quality as a function of position.

Thus it is another object of the invention to determine the length of splits for the purpose of guiding a cutting of the wooden member to optimize its usage.

The foregoing and other objects and advantages of the invention will appear from the following description. In the description, reference is made to the accompanying drawings which form a part hereof and in which there is shown by way of illustration a preferred embodiment of the invention. Such embodiment does not necessarily represent the

full scope of the invention, however, and reference must be made to the claims herein for interpreting the scope of the invention.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a perspective view in partial cutaway of a wooden member as may be moved in a translation direction with respect to opposed ultrasonic transducers incorporated into wheels and pressed against the opposed sides of the wooden member, FIG. 1 further showing other sensing devices for characterizing the wooden members' shape and position;

FIG. 2 is a block diagram showing the transducers and wooden member of FIG. 1 together with associated processing circuitry for generating and receiving ultrasonic signals and processing the same including an electronic computer having a standard computer monitor and keyboard;

FIG. 3 is a schematic representation of a processing program executed by the computer of FIG. 2 receiving an ultrasonic waveform through the wooden member and comparing it to a transmitted ultrasonic waveform passing through a standard material to produce multiple measurement parameters which may be combined to detect localized anomalies;

FIG. 4 is a graph of two such parameters, specifically pulse length and insertion loss (defined below), plotted against distance along the translation axis showing the position of local anomalies evident by examination of these two parameters;

FIG. 5 is an alternative embodiment of the transducer assembly of FIG. 1 showing multiple transducers positioned in an array along an x-axis across the grain of the wooden member to provide improved localization of the internal anomalies of the wooden members;

FIG. 6 shows a plan view in cross section of the wooden member and transducers of FIG. 1;

FIG. 7 is a figure similar to that of FIG. 3 showing the multiparametric measurement of FIG. 3 applied to the additional dimension of x or z (the translation axis) in the embodiments of FIGS. 5 and 6 to provide a more robust measurement of localized anomalies;

FIG. 8 is a figure similar to FIG. 5 showing transducers arrayed radially around the circumference of the wooden member such as may be useful for the detection of internal splits or checks;

FIG. 9 is a block diagram similar to that of FIG. 3 showing the repetition of the element of FIG. 3 for each of the transducers of FIG. 8 and collected by a parameter extraction block identifying an orientation of a split;

FIG. 10 is a figure similar to that of FIG. 8 showing the use of the transducer assembly of FIG. 8 for tomographic analysis of the internal structure of the wooden member;

FIG. 11 is a fragmentary view of FIG. 9 showing a tomographic back projection block used to replace the parameter extraction block of FIG. 9 when the assembly of FIG. 8 is used for tomographic analysis;

FIG. 12 is a figure similar to that of FIGS. 8 and 10 showing the wooden member in cross section along the x-y plane with a single pair of transducers positioned for the detection of dynamic splits caused by a sawing operation;

FIG. 13 is a view of the wooden member of FIG. 12 along the x-z plane showing a development of a dynamic split with respect to the transducers of FIG. 12 during the cutting operation caused by the cantilevered weight of the end of the wooden member;

FIG. 14 is a schematic representation of a computer controlled cutoff saw suitable for cutting wooden members as characterized by the present invention so as to optimize usage of wooden members based on the location of identified anomalies;

FIG. 15 is a cross sectional view of a transducer of FIG. 1 having a spiked outer collar for penetration of bark and/or for better coupling with the wooden member;

FIG. 16 is a view similar to that of FIG. 5 showing transducers positioned along both the x and y axes about a board;

FIG. 17 is a graph of signal voltage vs. time for a representative waveform of FIG. 3 passing through the standard material;

FIG. 18 is a graph of signal voltage vs. time for a representative waveform of FIG. 3 passing through the wooden member being evaluated;

FIG. 19 is a view similar to FIG. 13 showing an alternative embodiment of the transducers using spiked transducers and a plunge translate and retract mechanism; and

FIG. 20 is a figure similar to that of FIG. 12 showing mounting of wheeled transducers for rotational translation about the wood.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to FIG. 1, a wooden member 10 such as a log is shown positioned horizontally so that its grain direction and axis define a z-axis of a Cartesian coordinate system with the x-axis directed generally upward and the y-axis horizontal. As will be understood from the following description, the term wooden member should be held to embrace trees, logs, lumber, boards and wood composites in various stages of processing.

The wooden member 10 may be moved in a translation direction 12 with respect to a measurement assembly 14 by one or more driven rollers 26 that support the wooden member 10 from underneath. In some instances (not shown here), the wooden member may be rotated.

The measurement assembly 14 includes a first (transmitting) and second (receiving) ultrasonic transducer 16 encased in rollers such as may roll against the surface of the wooden member 10 as it moves in the translation direction 12. The ultrasonic transducers 16 are opposed along the y-axis to transmit and receive an ultrasonic signal through the wooden member 10 radially and perpendicular to the grain, and are attached to slide assemblies 18 (only one shown) which are biased toward the wooden member 10 by an air cylinder 20 or the like. The wheels of the transducers 16 thereby maintain contact with the outer surface of the wooden member 10 while being free to rotate about their axes.

A linear position sensor 22 may be attached to the slide assembly 18 so as to provide a measurement of the separation of the transducers 16 and hence a measurement of the width of the wooden member 10 along the axis between the transducers 16. An encoder/roller assembly 24 positioned against the outer surface of the wooden member 10 provide a measurement of the z-axis position of the wooden member 10 as it moves in the translation direction 12. Auxiliary sensors, such as photoelectric proximity sensors 28, may be positioned separated along the z-axis and directed downward along the x-axis to detect the beginning and end of the wooden member 10 as it moves, and thus to provide a measurement of its length. A sensor array 30 having multiple

orientation of the ultrasound beam **48**, which also results in interference modifying the received waveform **50**. This analysis involves extracting various parameters **52** from the received waveform **50** each parameter **52** selected to detect a distortion in the received waveform **50** caused by interference between waveforms on different paths **54** and **54'**.

A basic parameter is that of the spreading of the received waveform **50** with respect to the standard waveform **46** caused by variation in the effective path lengths **54** and **54'** (caused both by differences in path length and differences in sound speed) such as tends to spread the received waveform **50** in time. Pulse length is defined in the preferred embodiment as 1.25 times the time required for the received wave energy integral to rise from ten percent to ninety percent of its final value. Wave energy as understood in the art is determined by the formula

$$WE = \int v^2(t) dt. \quad (1)$$

where v is the voltage produced by the transducer **16** and t is time. The pulse length of the received waveform **50** is compared against the pulse length of the standard waveform **46** calculated in a similar manner to produce the relevant parameter.

The effect of the localized anomaly **45** may also change the insertion loss between the two transducers **16'** and **16**. This forms a second parameter of the measurement and is defined as the ratio of the energy received by the transducer **16'** to the energy input into the wooden member **10** by the transducer **16** according to the following formula:

$$IL(db) = 10 \log[E_r/E_t]G \quad (2)$$

where E_r is the received energy E_t is the transmitted energy and G is the receiver gain as may be programmed as described above. Insertion loss may be further compared to a reference value taken through a standard of known acoustic properties such as a clear wooden members or a standard reference material such as water or homogenous plastic block. Insertion loss may be further compared as a function of the distance that the ultrasound wave travels through the wooden member (using a width measurement from the linear position sensor **22**), expressed in Decibels per inch (or decibels per centimeter).

A third parameter may be the time of flight of the pulse determined by a correlation of the standard and received waveforms **46** and **50** such as may provide an indication of the overall qualities of the wooden member **10** outside of the localized anomaly **45**. This time of flight value may alternatively be divided by a width measurement from the linear position sensor **22** to produce a sound velocity measurement.

A fourth parameter uses a deconvolution of the received waveform **50** by the standard waveform **46** which may be expressed mathematically as either

$$FFT^{-1} \left(\frac{\text{Cross Power (Reference, Unknown)}}{\text{Power Spectrum (Unknown)}} \right) \quad (3)$$

or

$$FFT^{-1} \left(\frac{FFT(\text{Unknown})}{FFT(\text{Reference})} \right) \quad (4)$$

where FFT and FFT^{-1} are the Fourier transform and the inverse Fourier transform, respectively, and wherein the Unknown is signal through the wooden member **10** and the Reference is a signal through a reference standard of known

acoustic properties. This deconvolution allows the detection of multiple signal paths through the wooden member **10** whose variation may indicate the presence of a localized anomaly **45** which creates effectively a new path through the wooden member **10**. Other methods such as homomorphic filtering known to those of skill in the art may be used for the same purpose.

Referring now to FIGS. **3** and **4**, two or more parameters may be compared over the length of the wooden member **10** along the translation direction **12** to detect localized anomalies **45**. In the example of FIG. **4**, peaks in pulse length **52(a)** and troughs in insertion loss **52(b)** correlate to regions **55** in which localized anomalies **45** are found. Accordingly, an empirically derived rule may be developed by testing each of pulse length **52(a)** and **52(b)** against a threshold and logically ANDing the test outcomes together to produce an output indicating a localized anomaly **45**. The rule may be implemented by explicit rules programmed into the computer **34** or may be performed by artificial intelligence techniques such as neural networks or fuzzy logic known in the art. Such rules are shown by rule application block **57** and may combine two or more parameters **52**.

The benefits of multiple parameter measurement can be further seen in Table I below for various types of wood conditions.

TABLE I

Parameter	Normal	Wetwood	Knot	Honeycomb
Insertion Loss (dB)	-50	-70	-66	-78
Pulse Length (μs)	110	235	244	239
Time of Flight	80	90	80	96

Referring now to FIG. **5**, an array of ultrasonic transducers **16** and **16'** may be positioned at varying x-axis locations on the side of the wooden member **10** pairs opposed along different axes both radial and tangential to the wooden member **10** across the grain of the wooden member **10** to provide a different parametric reading for each x-axis location. These transducer arrays provide additional spatial information about the location of a localized anomaly **45** in the x-axis direction. In an alternative embodiment shown in FIG. **16**, transducers **16** may be placed arrayed along either or both of the x and y-axis to locate the localized anomaly **45** with respect to the x and y-axes. This embodiment is particularly useful for grading lumber as to strength where the location of a knot, as opposed simply to its existence, is important as to its effect on strength. Strength grading can be used to determine the location of pieces of lumber in the final product, for example a pallet, where stronger pieces of lumber are used for the core of the pallet and the weaker pieces of lumber are used for the planking that serves merely to provide the pallet surface. In the embodiment of FIG. **16**, individual top transducers **16** may be excited while readings are taken at all bottom transducers **16** so as to obtain measurements along four simultaneous axes for each excitation and reading along sixteen axes for all four top transducers **16**. These multiple readings may be used to triangulate the location of the anomaly.

As shown in FIG. **7**, the parameter extraction block **51** for any of these multiple measurement embodiments of FIGS. **6** and **7** will receive a two dimensional array of standard waveforms **46-46''** and received waveforms **50-50''**. Each corresponding standard and received waveform **46** and **50** may be compared as described with respect to FIG. **3** but in additional cross combinations of the various waveforms may also be used to produce new effective particular parameters such as spatial rates of change of the parameters in the x or z direction.

As before, these parameters **52** may be provided by rule application block **57** to produce an output **56** providing an identification of localized anomalies **45** and further providing additional spatial location of localized anomalies **45** in the x-axis or y-axis. Specifically, the x- and y- axis positions of localized anomalies **45** may be determined from the parameters derived from the location of individual transducer pair satisfying the rule of rule block **57** in the same way that the z-axis position is determined as described with respect to FIG. 4. In this way, a map of the spatial location of localized anomalies **45** for the entire wooden member **10** may be developed.

Using this map, decisions about length of cuts of the wooden member **10** across the z-axis (to remove localized anomalies **45** from boards) may be augmented with decisions about rip cuts of the wooden member **10** along the z-axis such as to maximize the value of the cut wood by moving localized anomalies **45** among boards.

Referring now to FIG. 8, a set of transducers **16** may be arrayed about the periphery of the wooden member **10** so that the plane of the wheels of each transducer **16** includes the z-axis and extends radially therefrom so as to provide axis **61** between pairs of transducers **16** that extend radially through the wooden member **10**. This configuration may be used to identify splits **60** within the wooden member **10** such as have a varying cross section depending on the radial direction along which they are viewed. Thus such splits **60** may be localized to lie narrowly along one radial direction while being relatively broad in another radial direction.

Referring to FIG. 9, each opposed pair of transducers **16** is connected to a parameter extraction block **51** (as described above) so as to provide a plurality of parameters **52** associated with different radial angles. Each parameter extraction block **51** is associated with a rule application block **57** to produce an output **56** for each radial angle. The outputs may be compared by a parameter extraction block **62** to identify the plane of the split as it crosses the x-y axis. In one embodiment, the parameter extraction block **62** may be a simple magnitude comparator. Generally the radial angle associated with the greatest insertion loss will be perpendicular to the plane of the split **60**.

EXAMPLE I

Measurements were made of a log prior to cutting (“undisturbed”) and after cutting, at various angles with respect to a split as indicated in the following Table II. The measurements were time of flight (TOF) as detected by an amplitude threshold (TOFa) or an energy threshold (TOFe). Pulse length (PL) using IEC standard 1157 and insertion loss (IL) were also measured.

TABLE II

Angle with Respect to Split	TOFe	TOFa	PL	IL
90°	501	449.9	306.27	-89.76
45°	553.8	434.3	290.87	-81.85
0°	220.5	146.9	175.42	-69.26
undisturbed	193.1	146.2	172	-73.93

The zero degree reading corresponds closely to the undisturbed reading however the 45° and 90° readings differ significantly from the baseline readings. The changes in pulse length and times of flight are by factors of 1.5 to 2.5; the insertion loss change is over 20 db, or 100 to 1.

Table III below provides successive readings of the same parameters taken along the log at increasing distances from the cut face.

TABLE III

Distance from Cut (mm)	TOFe	TOFa	PL	IL
at cut face	503.1	331.8	407.05	-93.55
220	239	120.8	435	-95
240	221	141	425	-93.1
280	210	142.2	176	-80.98
300	187	138.9	158	-70.7
330	181	139.5	140.5	-71.66
Undisturbed	177.5	142	147	-70.5

In this case the three parameters change independently. The times of flight change quickly as a function of distance from the cut face because any sound transmission around the cut will reach the receiver as quickly as in the undisturbed case. However, the pulse length and insertion loss indicate reduced amplitude and significant pulse distortion from multipath signals. At 280 mm from the cut face, the pulse length has reduced to near its original values indicating that the signal is predominantly a direct path from transmitter to receiver. The remaining split has caused a reduction in signal strength, but has not affected the other parameters. Finally at 300 mm and beyond, the signals have returned to their original values.

Referring now to FIG. 10, in an alternative embodiment to the embodiment of FIG. 7, the consideration of the cross terms of the various standard and received waveforms **46** and **50** and their deduced parameters may be realized with a tomographic reconstruction. In this tomographic reconstruction, each ultrasonic transducer **16**, for example, ultrasonic transducer **16(a)** may sequentially serve as a source of ultrasonic energy to be received by each of the other ultrasonic transducers (b) through (h). Relatively narrow effective beam widths along projection lines **63** may be obtained in this manner. The standard waveform **46** of the selected ultrasonic transducer **16a** may be compared pairwise to the received ultrasonic waveforms **50** of each of the ultrasonic transducers **16b-h** to produce a separate parameter measurement. The parameters measured may be any of those previously described or other similar measurements.

Referring to FIG. 11, the parameters themselves or rule based combinations of parameters derived from measurements along ones of different projection lines **63** are then provided to a tomographic reconstructor **66** such as is known in the art of x-ray tomography to provide an image of a cross sectional cut through the wooden member **10** in the x-y plane. Such a tomographic reconstructor **66** may use a fan beam, filtered back projection algorithm known in the art. This x-y mapping may augment z-axis information obtained by taking multiple projections at different z-axis locations along the wooden member **10** allowing for multidimensional optimization of the cutting of the wooden members.

Referring now to FIG. 12, in a variation on the embodiment of FIG. 8, a single pair of transducers **16** and **16'** may be placed in vertical opposition about the wooden member to detect dynamic splits **60** occurring in a horizontal plane as caused by a cutting of the wooden member **10**. Referring also to FIG. 13, such splits may occur when a cut by a saw **68** is made in the x-y plane part way through the wooden member **10** upon which the cantilevered weight of an end **70** of the wooden member **10** exert a downward force **71** causing the split **60**. Such dynamic splits caused by force **71**

may close after the cut is complete but may still be identified by the technique of FIG. 8. However, by using a concurrent transmission of ultrasonic energy adjacent to the cut line of the saw 68 on the supported side of the wooden member 10 during the cutting process, the split may be detected as it occurs and decisions about the board made in real-time. Again multiple transducers displaced as shown in FIG. 6 may be used to characterize the depth of the split. Appropriate bandpass and time window filtering and choice of measurement parameters may be used to permit the split to be detected without interference from both the electronic and vibrational noise of the cut of the saw 68. Knowing that the split 60 is occurring may allow the saw operator to adjust the sawing procedure to reduce the incidence of splitting. Further knowing the depth of the split with a disposition of the transducers (not shown) along the z axis or the length of the wooden member may allow the operator to adjust the length of the sawn wooden member 10 such that a desired length of un-split wood is produced.

Referring now to FIG. 14, the present invention provides in the memory 39 of the computer 34 a map 72 of the wooden member 10 indicating sites 74 of local anomalies 45 identified to spatial locations within the wooden member 10. The computer 34 reading the map 72 and executing commercially available optimization routines may control a computer movable saw 76 as are understood in the art to make appropriate cross cuts and rip cuts of the wooden members 10 so as to optimize the value of the wooden members 10 in the commercial market. Alternatively or in addition, the computer 34 may provide output to a commercial sorting machine to mark or direct the wooden member as to strength or grade thereby allowing more efficient use of lumbers of different strengths and in particular better use of lower grade lumbers so as to waste less wood.

It will be also understood that the detection method of the present invention may be combined with conventional visual or laser type knot and split detection equipment to augment those systems to obtain more robust detection or greater detection range.

Referring now to FIG. 19, in an alternative embodiment, transducer 16a and 16b providing opposed transmitting and receiving ultrasonic transducers aligned along an axis 90 through wooden member 10 may have spike portions 92 presenting a sharpened tip that may be plunged into the wood member 10 along axis 90 thereby passing through an outer layer of bark 94. Each of transducers 16a and 16b may be mounted to a bidirectional hydraulic or air cylinder 96 (shown only for transducer 16a) which when activated in a first direction may move the transducers 16 toward the wooden member 10 and when activated in a second direction may retract it away from the wooden member 10.

The cylinder 96 may be mounted on a z-axis carriage 98 allowing it to move with motion of the wooden member 10 in the z direction for continuous processing and measurement of the wooden member 10. At the conclusion of the translation of the log in the z direction, the transducers 16 may be retracted and a second hydraulic cylinder 99 may be used to advance the carriage 98 back along the z-axis whereupon the transducers 16 may be reinserted into the wooden member 10. In this way, the transducer 16a and 16b follow a rectangular cycle 100 permitting continuous motion of the wooden member 10.

Referring to FIG. 20, in yet another embodiment, transducers 16 may be mounted on a carriage 102 extending about the wooden member 10 in the x-y plane allowing them to be rotated orbitally about the Z-axis of the wooden

member 10 so as to obtain measurements along a number of different radial x-y paths through the wooden member 10 for use in detection of split 60 or for tomographic-type measurements. The transducers may be retracted to allow z axis motion of the wooden member 10 or the transducers 16 may be canted so as to allow them to roll in a helical path with respect to the wooden member 10 as the wooden member 10 moves along the Z-axis for substantially continuous processing. The carriage 102 thus provides a scanning means that is an alternative to the extraction block 62 which provides an electronic scanning.

The above description has been that of a preferred embodiment of the present invention, it will occur to those that practice the art that many modifications may be made without departing from the spirit and scope of the invention. In order to apprise the public of the various embodiments that may fall within the scope of the invention, the following claims are made.

We claim:

1. An apparatus for detecting splits in wooden members comprising:

at least one pair of ultrasonic transducers positioned to contact the wooden members on opposed points along an axis in a planar cross-section across a grain of the wooden member;

driving circuitry for driving one of the ultrasonic transducers so as to produce an ultrasonic wave of known characteristics;

detection circuitry connected to an other of the ultrasonic transducers receiving the ultrasonic wave after passage through the wooden member to provide a measurement; and

an electronic computer communicating with the driving circuitry and detection circuitry and executing a stored program to compare wooden member measurements taken through the wooden member across the grain of the wooden member at a plurality of angles about the perimeter of the planar cross-section of the wooden member to detect a location of a split in the wooden member indicated by variation in the measurements.

2. The apparatus of claim 1 wherein the wooden member measurement is of an attenuation of the ultrasonic wave and wherein the split is detected by a variation in attenuation of the ultrasonic wave at different angles about the perimeter of the planar cross-section of the wooden member.

3. The apparatus of claim 1 further comprising multiple pairs of ultrasonic transducers each positioned to transmit and receive an ultrasonic wave at different angles about the perimeter of the planar cross-section of the wooden member.

4. The apparatus of claim 1 further comprising a movable carriage holding at least one pair of ultrasonic transducers and movable about the wooden member in said planar cross-section to position the ultrasonic transducers at said plurality of angles about the perimeter of the planar cross-section of the wooden member.

5. The apparatus of claim 4 wherein the ultrasonic transducers are fitted within wheels and wherein the wheels are positioned to roll about the periphery of the wooden member with movement of the carriage.

6. The apparatus of claim 5 further including means for moving the wooden member along the axis with respect to the ultrasonic transducers and wherein the wheels are oriented to trace a helical path along the periphery of the wooden member.

7. The apparatus of claim 1 wherein the measurement is selected from the group consisting of: attenuation of the total

13

energy, change in spectral energy distribution, change in phase, time of flight, and spreading of the temporal distribution of the energy in the ultrasonic wave.

8. The apparatus of claim 1 wherein the measurement is a function of at least two measurements selected from the group consisting of: attenuation of the total energy, change in spectral energy distribution, change in phase, time of flight, and spreading of the temporal distribution of the energy in the ultrasonic wave.

9. The apparatus of claim 1 including means for measuring the thickness of the wooden members along the axis and wherein the electronic computer corrects the wooden member measurements to the thickness of the wooden members.

10. The apparatus of claim 1 further including means for moving the wooden member with respect to the ultrasonic transducers perpendicular to the axis in a translation direction, and wherein the wooden member measurement is a function of distance along the translation direction.

11. A method of detecting splits in wooden members comprising:

positioning at least one pair of ultrasonic transducers so as to contact said wooden member at spaced positions around a perimeter of the wooden member in a planar cross-section across a grain of the wooden member;

applying a driving signal to at least one ultrasonic transducer to cause said at least one ultrasonic transducer to produce an ultrasonic wave of known characteristics for transmission in said planar cross-section across said grain of the wooden member;

an ultrasonic transducer other than said at least one ultrasonic transducer receiving the ultrasonic wave after passage through the wooden member to provide a measurement;

repeating said applying and receiving steps for pairs of said ultrasonic transducers disposed at a plurality of

14

different angles about the perimeter of the planar cross-section of the wooden member; and comparing measurements taken at each of said plurality of different angles so as to detect variations in the measurements indicative of a location of a split or other abnormality in the wooden member.

12. A method as in claim 11, wherein said positioning step includes the step of positioning a plurality of pairs of opposed ultrasonic transducers around the perimeter of the wooden member in said planar cross-section across the grain of the wooden member and said repeating step comprises the steps of applying the driving signal to an ultrasonic transducer in each pair of ultrasonic transducers and detecting the resultant ultrasonic wave at the other ultrasonic transducer in each pair of ultrasonic transducers.

13. A method as in claim 11, wherein said positioning step includes the step of positioning a plurality of ultrasonic transducers so as to be spaced around the perimeter of the wooden member in said planar cross-section across the grain of the wooden member and said repeating step comprises the steps of applying the driving signal to one of said ultrasonic transducers and detecting said ultrasonic wave at each of the other ultrasonic transducers besides said one ultrasonic transducer.

14. A method as in claim 11, wherein said repeating step comprises the steps of mechanically displacing said at least one pair of ultrasonic transducers to different positions about the perimeter of the planar cross-section of the wooden member, applying the driving signal to one ultrasonic transducer in each pair of ultrasonic transducers at each different position to produce said ultrasonic wave, and detecting at each of said different positions said ultrasonic wave at the other ultrasonic transducer in each pair of ultrasonic transducers.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. :
DATED : 6,092,418
INVENTOR(S) : July 25, 2000
Mark E. Schafer et al

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Col. 1, line 13, insert the following:

--This invention was supported by funds from the U.S. Government (98-CRADA-3162) and the U.S. Government may therefore have certain rights in the invention--

Col. 1, line 39, "Traditionally" starts a new paragraph

Col. 2, line 24, change "reansducers" to --transducers--

Col. 2, line 26, after "of" insert --circumferential--.

Col. 2, line 27, delete the word "cicumferential"

Signed and Sealed this

Twenty-fourth Day of April, 2001

Attest:



NICHOLAS P. GODICI

Attesting Officer

Acting Director of the United States Patent and Trademark Office