


Alternative 3 Iditarod National Historic Trail Turnagain Pass - Turnagain Arm Area

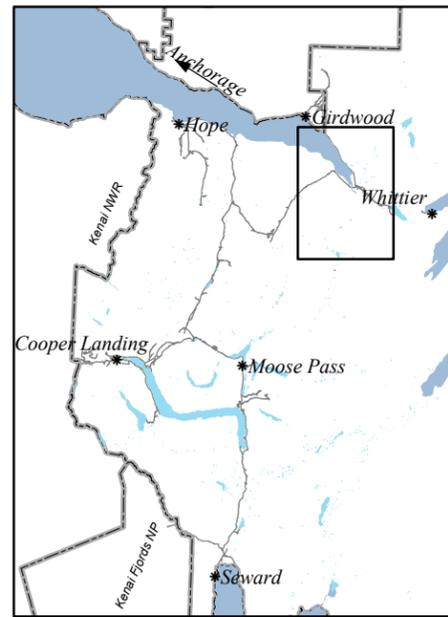

Turnagain Pass - Arm Area (TP-TA)								
(Note: Segments RR2,3, H6,7,8, P1,2 are displayed on the area map and in table for reference, but are not included in summary text)								
Segment	Miles	1986 INHT Comprehensive Plan	AK DOT & AK RR*	Alternative 3 FS Action	Trail Class	Primary** Managed Use (summer)	Primary** Managed Use (winter)	Prohibited Trail Use
RR2	27.8	Primary Route	Rail Route	-	-	-	-	-
RR3	10.9	Primary Route	Rail Route	-	-	-	-	-
TP1	12.4	-	-	Main Route	3	none	snowmo	summer motor
P1	1.3	Connecting Trail	-	Portage Route	4	bike, hike	ski	summer motor
P2	4.5	Connecting Trail	-	Portage Route	4	hike	ski	summer motor
TA1	21.4	Connecting Trail	-	Main Route	2	hike	none	summer motor
TA2	4.9	Connecting Trail	-	Main Route	1	none	snowmo	all summer use
H6	11.6	Connecting Trail	Bike Path	-	-	-	-	-
H7	3.5	Connecting Trail	Bike Path	-	-	-	-	-
H8	7.6	Connecting Trail	Bike Path	-	-	-	-	-

* Indicates existing, planned or proposed AK Department of Transportation or AK Railroad INHT segments.
 ** Indicates actively managed trail use. Other trail uses allowed unless prohibited.

Turnagain Pass Area Summary: Trail segments for Alt. 3 in the Turnagain Pass Area shown on this map begin at the Rest Areas at the Pass. TP1 would continue in a northeast direction from the previous map (JP-TP), descending to the Arm by linking a series of muskegs, ending at the Kenai Peninsula Welcome sign. The portion of segment TP1 displayed on this map would be an approximately 6-mile long year-round trail, located primarily on State Lands.


The Forest Service would construct approx. 6 miles of trail for year round non-motorized use and for winter motorized use.

Turnagain Arm Area Summary: Trail segments begin in the Ingram Creek area (MP75) and continue to Twentymile and Portage Valleys using a Highway Bike Path (H7). It would continue toward Girdwood as segment H8. This bike path is included in the State's out-year planning process, scheduled to be constructed in 2005 at the earliest. The terrain in this location includes large expanses of tidal or riverine wetlands and six wide rivers making a route away from the highway impractical due to the extensive fill and long bridges that would be required.

Twentymile Valley: TA1 would provide an alternative to H8 by creating a primitive (class 2) trail up Twentymile Valley and over to Winner Creek. It would leave the the Seward Hwy at MP82, cross the railroad tracks and proceed NE along the north side of the valley. The west end of TA1 follows an old road alignment up to approximately 800' el., bypassing several privately-owned parcels, then returns to the toe of the slope and traverses through spruce-hemlock forests and alder thickets, fording several creeks and crossing avalanche deposition areas that retain snow year-round. A cabin would be constructed approx. 6 miles from the Hwy, out of view from the trail. TA2 is the winter corridor for snowmachine use in Twentymile Valley. It will be marked in the field but will have no constructed features.

The Forest service would construct approx. 8 miles of trail for summer non-motorized use and winter motorized use, and a foot crossing of the railroad tracks. All trail would be on NF lands except at the railroad crossing.

Trailheads: Access to the trail through Areas shown on this map would be provided at five existing pullouts, and one new one. They include Turnagain Pass West and East(MP68/68.5), which will be reconstructed as a joint DOT-FS project in the summer of 2003; Kenai Peninsula Welcome Sign (MP75), Portage Creek bridge (MP79.4) the Alaska Railroad's Portage station (MP80) for TA2, and a proposed site at MP82 for TA1. This proposed trailhead is recommended to be constructed as part of DOT's MP75-90 Highway reconstruction project which is scheduled for 2005 at the earliest. Parking for up to 20 vehicles, vault toilets and interpretive and informational signs should be considered for this site. Interpretive and informational signs would be installed at all sites. Vault toilets at the Kenai Peninsula Welcome Sign site would be added as part of trailhead reconstruction.

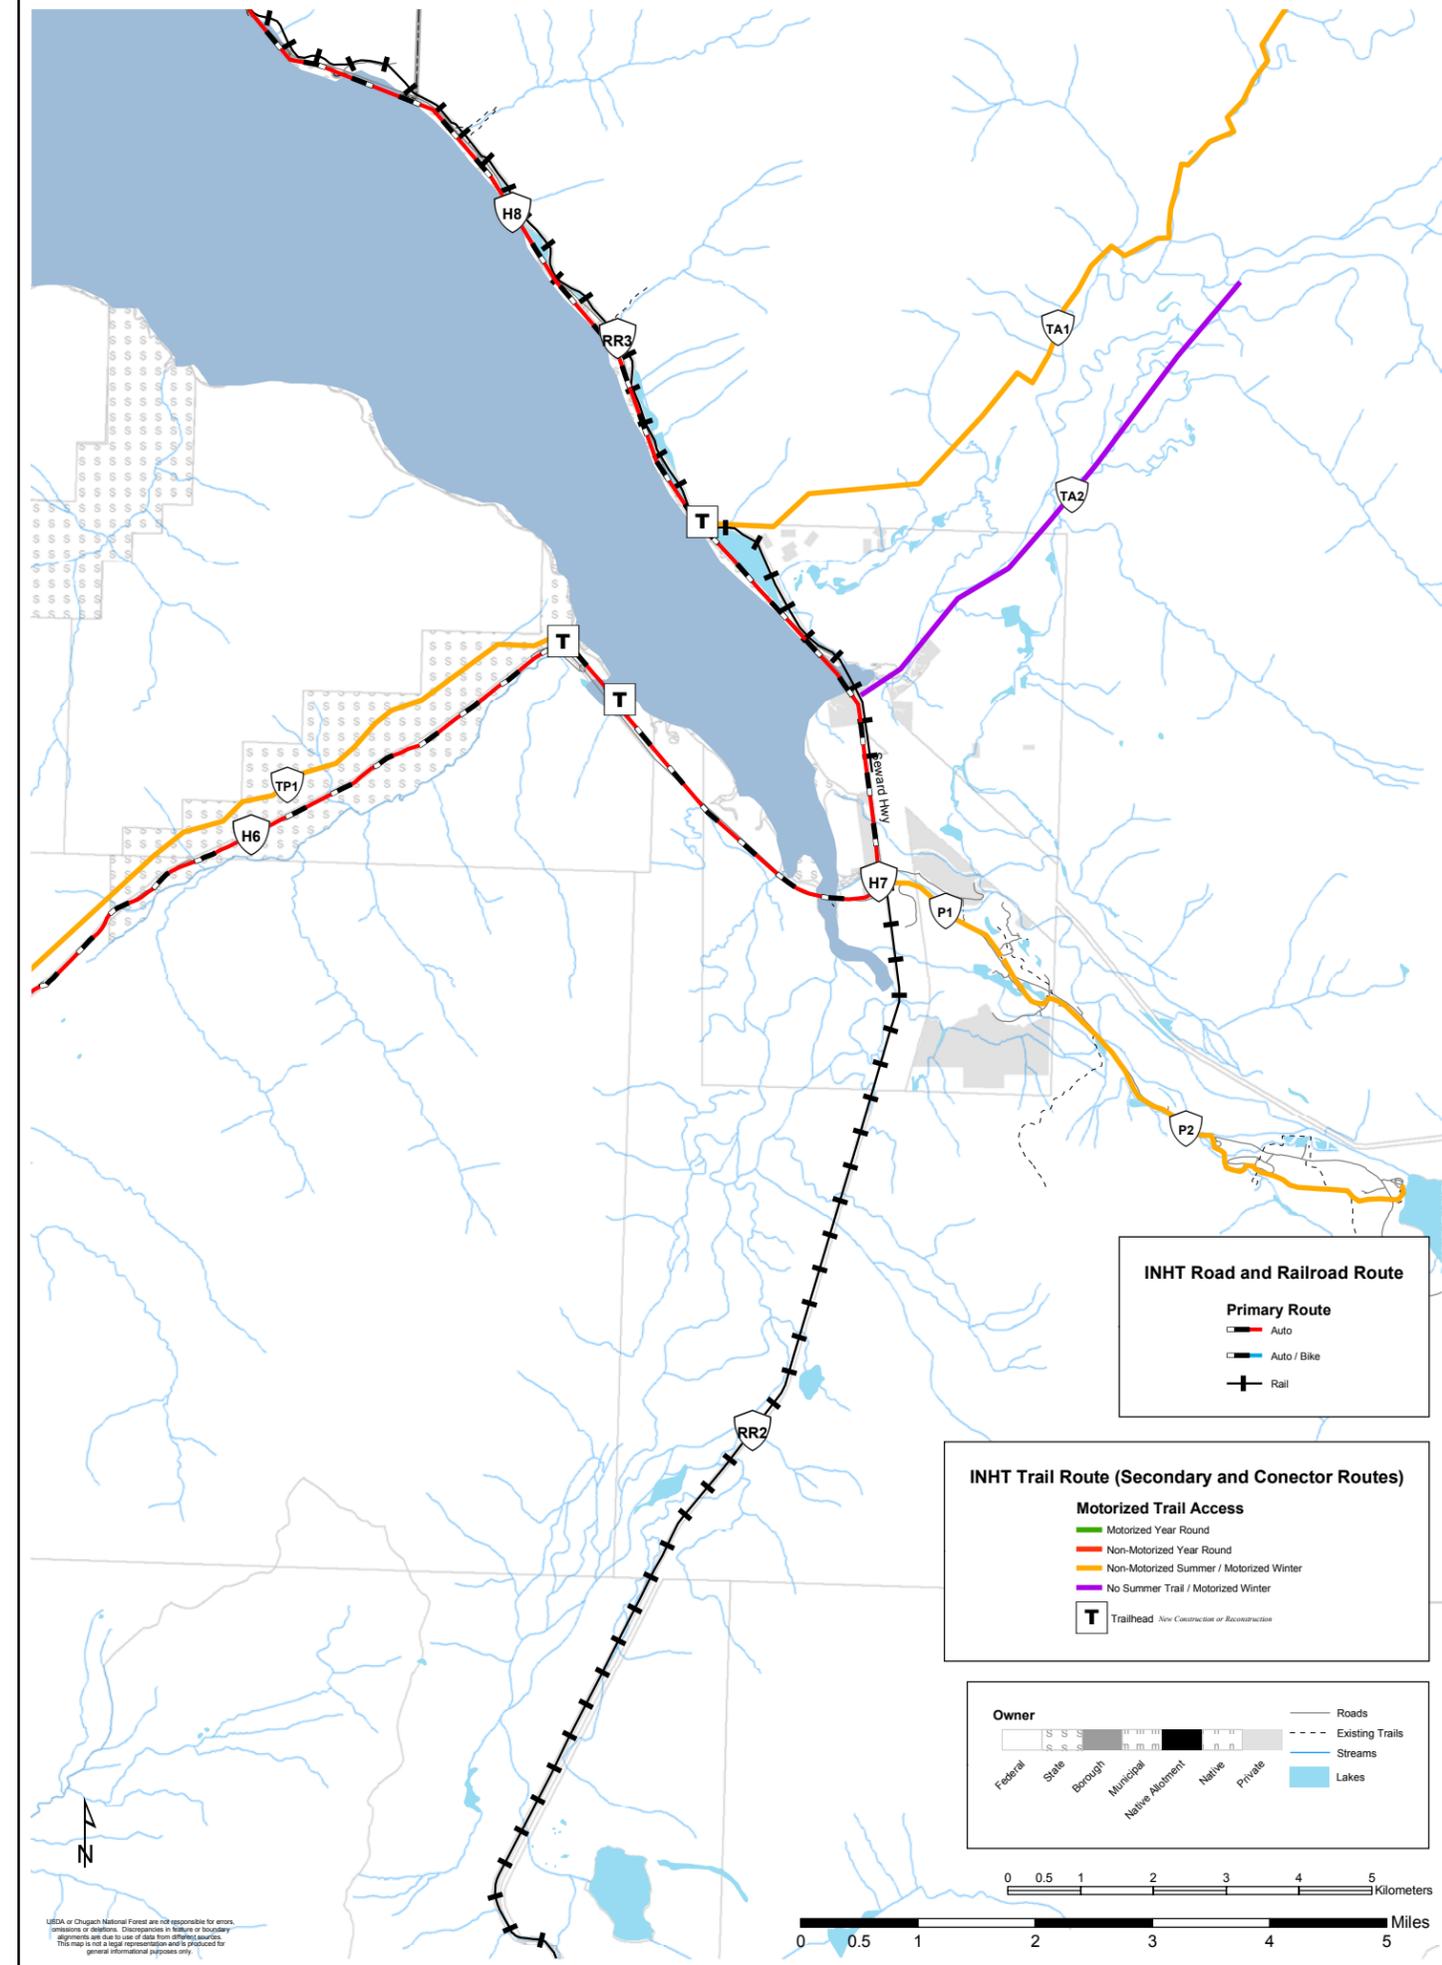

USDA or Chugach National Forest are not responsible for errors, omissions or deletions. Discrepancies in feature or boundary alignments are due to use of data from other sources. This map is not a legal representation and is produced for general informational purposes only.

USDA Forest Service, Chugach National Forest, Seward Ranger District. This Map (K:\plan\project\projects_0201_iditarod\alt_1_web_map_girdwood_area.mxd) was produced on 5/22/2003 at 6:43:17 AM