STACKED ROCK BARRIER

TYPICAL ID	CLEAR WIDTH	GEOTEXTILE TYPE	LEVELING COURSE TYPE	HEIGHT	WIDTH	COMMENTS
SRB–1			L			

N/A WHEN NOT APPLICABLE

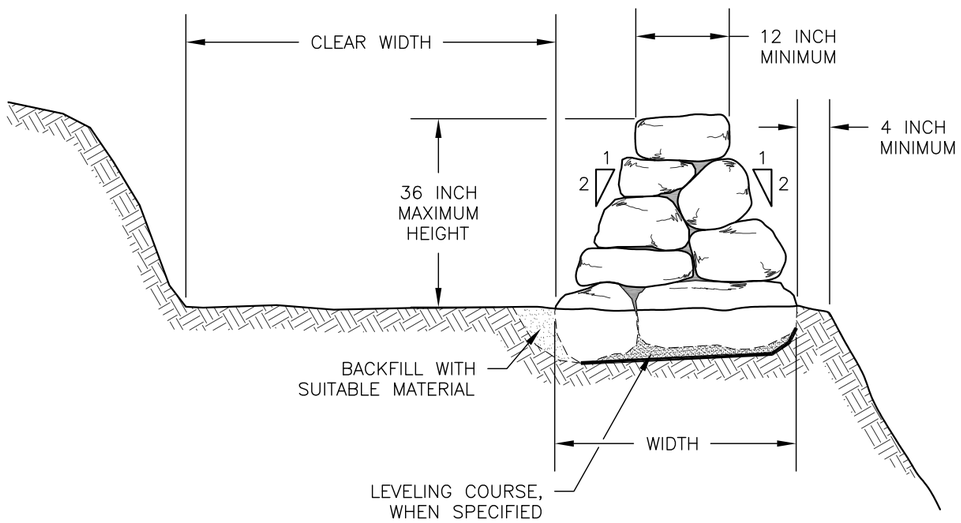

END VIEW

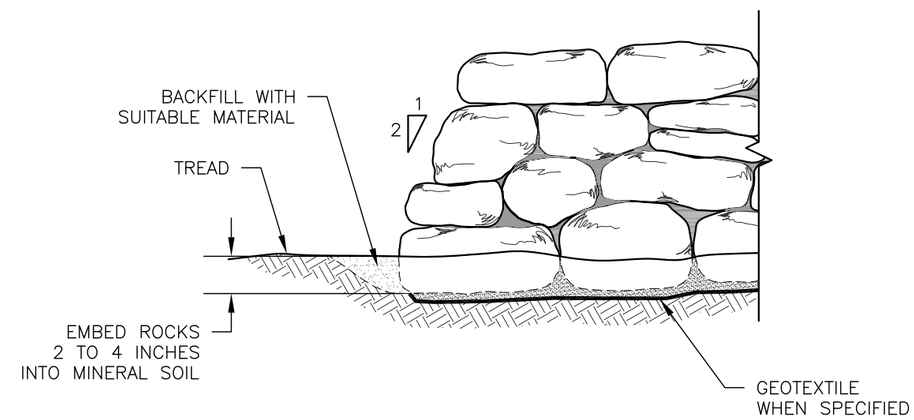

ELEVATION VIEW

NOTES:

1. USE ROCKS OF GENERAL RECTANGULAR SHAPE BETWEEN 45 AND 120 LBS. PLACE LARGER ROCKS ON BOTTOM.
2. USE ROCK CHIPS TO WEDGE LARGER ROCKS IN PLACE TO FORM A STABLE WALL.
3. LEAVE A 4 INCH GAP EVERY 8 TO 10 FEET OR USE FLEXIBLE PIPE ON BOTTOM COURSE FOR DRAINAGE.
4. PROVIDE ORGANIC–FREE BACKFILL MATERIAL WHERE SHOWN ON DRAWINGS FOR LEVELING AND SUPPORT OF BASE ROCK.
5. REMOVE AND DISPOSE OF DUFF AND TOP ORGANIC LAYERS DOWN TO MINERAL SOIL.
6. CLEAR WIDTH IS GREATER OR EQUAL TO THE TREAD AND SHOULDER WIDTHS DEFINED IN SECTION 911.

LEVELING COURSE MATERIAL

TYPE	MATERIAL	GRADATION	COMMENTS
L1	PITRUN		
L2	AGGREGATE		
L3			